


VISIO SPORT

IP66 | IP54 SMART VERSION | IK10 | IK09 SMART VERSION |

Ball Impact Resistant


The Visio Sport retains all of the resilient properties of the Visio Pro with the added benefit of ball impact resistance. Designed for use in indoor sports facilities, the Visio Sport is rated IK10 and compliant with the demanding ball impact testing requirements from DIN EN 18032 Part 3 and DIN VDE 0710 Part 13.

DIMENSIONS

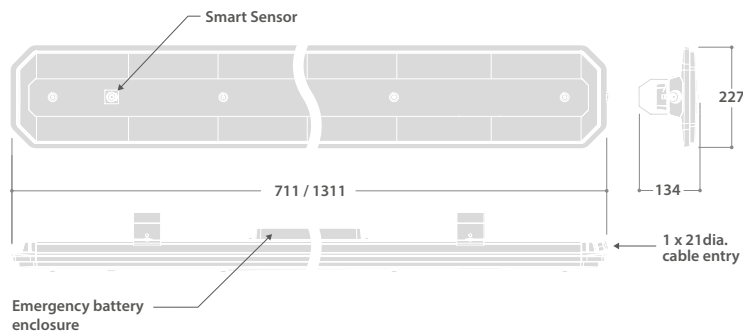

Nominal size	Fixing Centres		
	Min.	Max.	Recommended
800	400	500	420
1400	600	1100	700

PHOTOMETRIC GUIDE

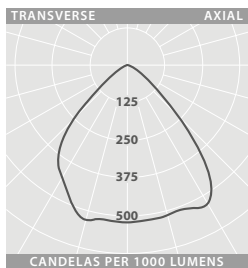

AREA BROAD

Luminaire Lumen Output:
 113W = 16485 lm
 141W = 23065 lm
 228W = 33465 lm

WEIGHTS

WATTAGE	APPROX. kg
113W	5.2
141W	9.2
228W	9.6

EMERGENCY

Add 0.3kg to weight listed.

SMARTSCAN AND SMART

Add 0.1kg to weight listed.

SUPREME PERFORMANCE LED LUMINAIRES FOR INDOOR SPORTS APPLICATIONS



SPECIFICATION

- Extruded aluminium body with die-cast ends finished full polyester powder coat silver (RAL9006)
- Long life silicone sponge gasket ensuring IP66/54 rating
- Up to 33,465 lumen output
- Up to 154.8 luminaire lumens per circuit watt
- Clip-fit stainless steel mounting brackets with locking kit (supplied)
- Smooth wipe clean surfaces, no dust traps
- Ball impact resistant to DIN EN 18032 Part 3 and DIN VDE 0710 Part 13
- Smart versions, suitable for use up to 8m mounting height
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 2m flying lead
- Fitted with 4000K LEDs



LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L70/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>94%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	154.8

For LED characteristics explanation see www.thorlux.com/led-guide

SmartScan Configurations



Find out more at www.thorlux.com/smartsan

CONFIGURATOR

EMERGENCY TYPE ♦	PRODUCT CODE	WATTAGE	NOMINAL SIZE	DISTRIBUTION	CONTROL TYPE
800mm Version					
W SmartScan*	VS Visio Sport	113 113W	S 800mm	AB Area Broad	S SmartScan
T AutoTest**					D Smart
E Emergency**					A Dimming (DALI)
					L Non-dimming
1400mm Version					
W SmartScan*	VS Visio Sport	141 141W	M 1400mm	AB Area Broad	S SmartScan
T AutoTest**		228 228W			D Smart
E Emergency**					A Dimming (DALI)
					L Non-dimming
E.g. WVS141MABS					
W SmartScan	VS Visio Sport	141 141W	M 1400mm	AB Area Broad	S SmartScan

♦ Optional, leave blank if emergency is not required

* Only available with S control type ** Not available with S control type