


STREET AND SITE LIGHTING

The basis for nostalgia



Unicliq LED unit

* Option

SGR

Application areas



Bicycle paths



Residential areas

Top cover: aluminium, coated

Light cover: UV-stabilised polycarbonate


Light source: LED, TC-L, TC-TEL, HSE-I, HSE-E/HST

IP 65

IK 09

CE

Dimensions in mm:

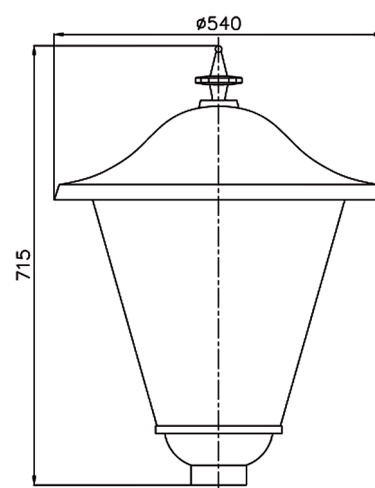




Technical specifications

LED	Lumen LED	LED (W)	System (W)
16	800	5.8	8
16	1050	6.2	8.4
16	1200	6.9	9.1
16	1350	7.8	10
16	1500	8.8	11
16	1600	9.7	11.9
16	1800	11.1	13.2
16	2000	11.9	14
16	2150	12.8	14.9
16	2300	13.4	15.5
16	2500	14.8	16.9
16	2750	16.3	18.4
16	3000	17.9	20

LIGHT SOURCE OTHER	POWER (W)
TC-L	1 or 2 x 18
TC-L	1 or 2 x 24
TC-TEL	1 x 32
HSE-I	1 x 50
HSE-I	1 x 70
HSE-E/HST	1 x 50
HSE-E/HST	1 x 70



Product specifications

- light cover polycarbonate, ice-structured finish
- aluminium top cover, black (RAL9005)
- UniCliq unit
- mass: ± 10 kg (depends on model)
- wind surface: ± 0.18 m²
- pole-mounted size: 60 mm
- safety class: I
- assembly-, installation- and maintenance-friendly
- voltage: 230 / 240 V, 50 Hz
- CRI: > 70
- colour temperature neutral white (4000K) or warm white (3000K)
- expected lifespan Hrs: 100,000 (L80 / F10)

Options

- opal bottom cover (not possible with Comfort or Monowide mirror optics)
- pole-mounted size 76 mm
- other RAL colour
- antieko light pole
- antieko bracket
- antieko wall holder
- dimmable
- safety class: II