



ADJUSTABLE EMERGENCY 2 x 3.5W LED TWIN HEAD SPOTLIGHTS FOR OPEN AREAS



SPECIFICATION

- IP20 version with steel body finished silver (RAL 9006)
- IP65 version with light grey polycarbonate gear housing
- Simple to install, full status reporting SmartScan wireless communication versions
- Uses two 3.5W high power LEDs
- 3 hour, non-maintained operation
- Adjustable lamp heads
- Available with narrow (29°) or wide (63°) beam
- Suitable for wall or ceiling mounting

DIMENSIONS

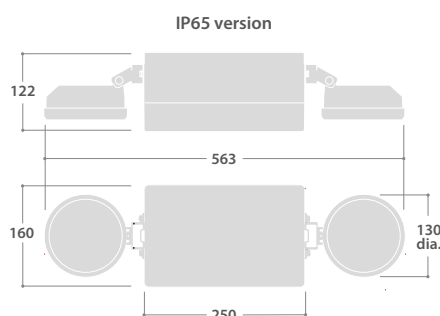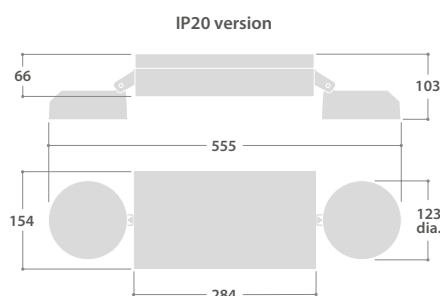

SmartScan Configurations



Find out more at www.thorlux.com/smartsan



RANGE


	LED	NARROW BEAM	WIDE BEAM	DURATION	APPROX. kg	TYPE
IP20	Emergency 2 x 3.5W	ENI 16033	ENI 16034	3-Hour	3.7	Non-maintained
	Auto-Test 2 x 3.5W	TNI 16033	TNI 16034	3-Hour	3.7	Non-maintained
	SmartScan 2 x 3.5W	WNI 16033	WNI 16034	3-Hour	3.8	Non-maintained
IP65	Emergency 2 x 3.5W	ENI 17182	ENI 17183	3-Hour	3.6	Non-maintained
	Auto-Test 2 x 3.5W	TNI 17182	TNI 17183	3-Hour	3.6	Non-maintained
	SmartScan 2 x 3.5W	WNI 17182	WNI 17183	3-Hour	3.7	Non-maintained

SPARES


DESCRIPTION	CAT. No.	APPROX. kg
Nickel Metal Hydride (NiMH) battery	EMB 048	0.15

End of life SmartScan batteries can be returned to Thorlux for recycling.

PHOTOMETRIC GUIDE



NARROW BEAM
Luminaire Lumen Output
325lm per head

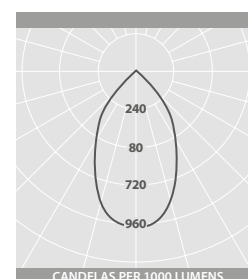

WIDE BEAM
Luminaire Lumen Output
345lm per head