




G3 PRO SURFACE

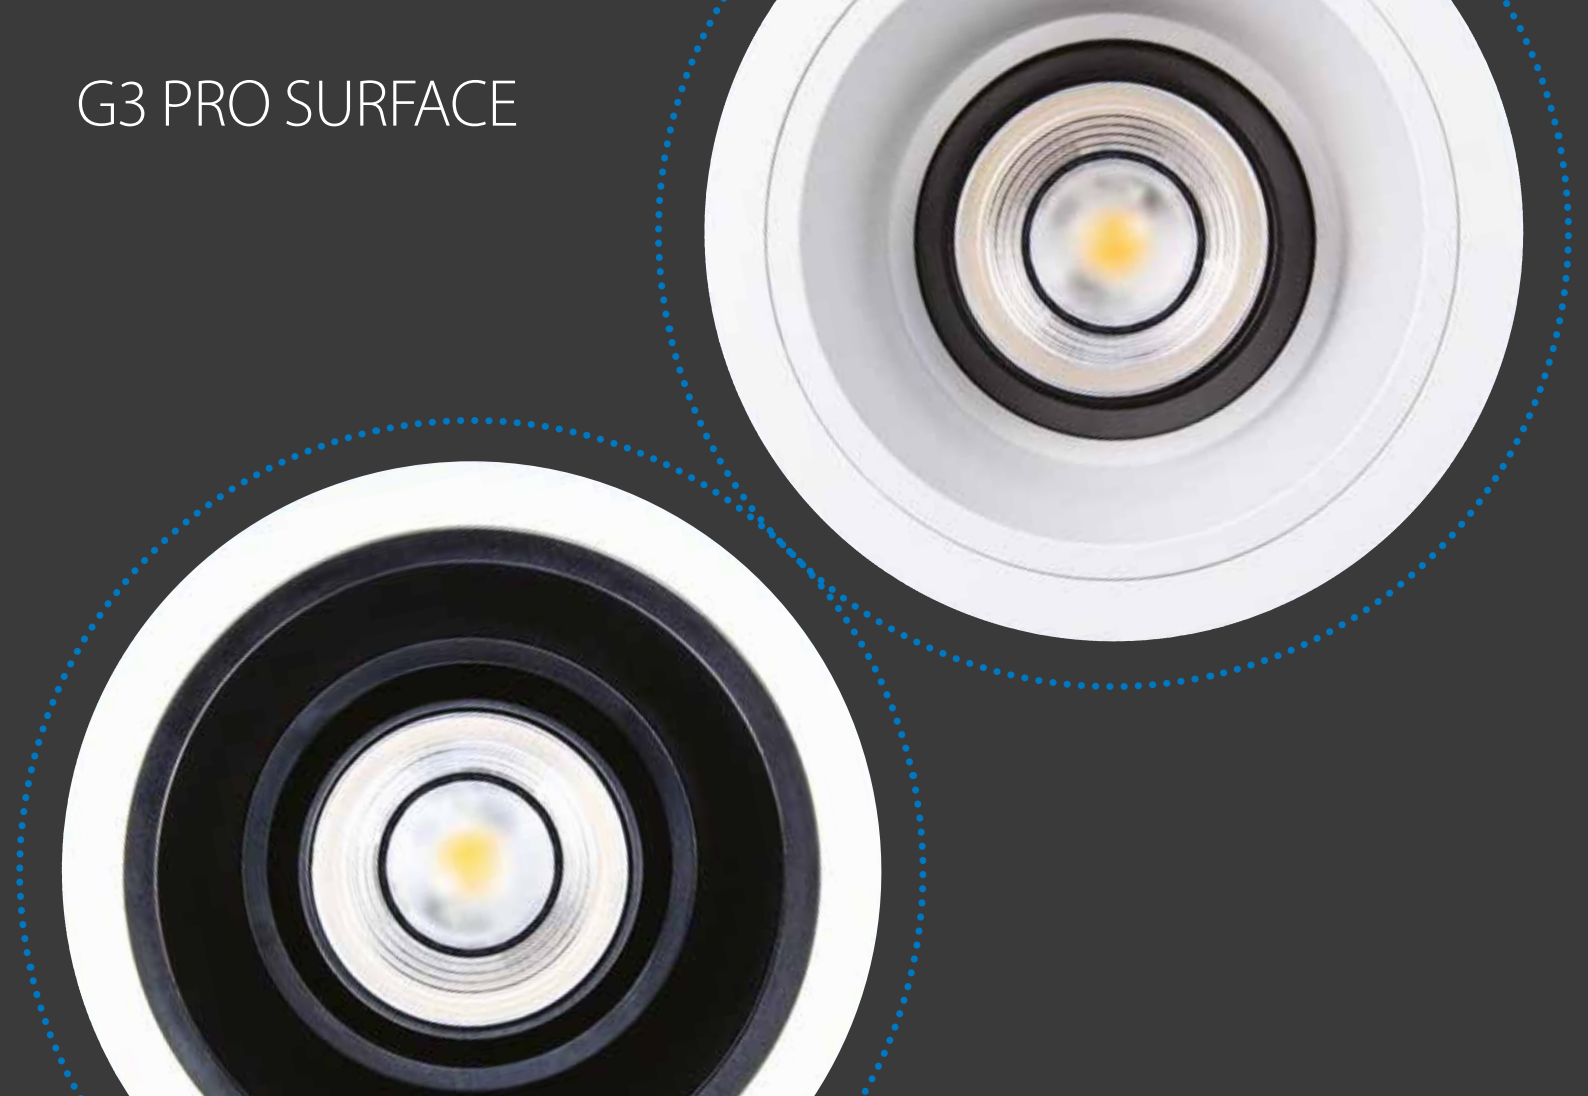

DIMENSIONS

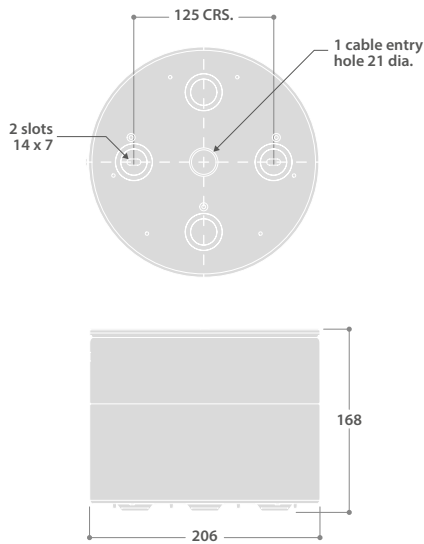


PHOTOMETRIC GUIDE




BROAD DISTRIBUTION WHITE OUTER REFLECTOR

LED	3000K (lm)	4000K (lm)
11W	1580	1700
24W	3030	3260
40W	4545	4885




NARROW DISTRIBUTION WHITE OUTER REFLECTOR

LED	3000K (lm)	4000K (lm)
40W	4515	4855



BROAD DISTRIBUTION BLACK OUTER REFLECTOR

LED	3000K (lm)	4000K (lm)
11W	1570	1690
24W	3010	3235
40W	4485	4820



NARROW DISTRIBUTION BLACK OUTER REFLECTOR

LED	3000K (lm)	4000K (lm)
40W	4420	4755



ENHANCED CIRCULAR SURFACE DOWNLIGHTERS



SPECIFICATION

- Spun aluminum body finished full polyester, non yellowing white (RAL9016)
- Tool free access and no visible fixings
- High performance vacuum metalized inner reflector with wide or narrow distribution options
- Choice of white or anti-glare black injection moulded flame-retardant outer reflector for dynamic appearance
- Excellent glare control at 50° and above
- AutoTest emergency versions
- CRI 90 LEDs with enhanced R9 value available to special order
- Fitted with 3000K/4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	3000K/4000K
RATED LIFE (HOURS)	50K - L70/B10
PROTECTION	-
DRIVER EFFICIENCY	>80%
REPLACEABLE	YES
POWER FACTOR	>0.9
LL/CW	121.4

For LED characteristics explanation see www.thorlux.com/led-guide

RANGE

	LED	3000K	4000K	APPROX. kg	CIRCUIT
WHITE OUTER REFLECTOR	Broad distribution				
	11W	GT 19890	GT 19894	2.0	L/A
	24W	GT 19891	GT 19895	2.0	L/A
	40W ▲	GT 19892	GT 19896	2.0	L/A
	Narrow distribution				
	40W ▲	GT 19893	GT 19897	2.0	L/A
BLACK OUTER REFLECTOR	Broad distribution				
	11W	GT 19898	GT 19902	2.0	L/A
	24W	GT 19899	GT 19903	2.0	L/A
	40W ▲	GT 19900	GT 19904	2.0	L/A
	Narrow distribution				
	40W ▲	GT 19901	GT 19905	2.0	L/A

CIRCUIT TYPE - suffix catalogue number with:

L - non-dimming (LED) / A - dimming (DALI) e.g. GT 19890L etc.

EMERGENCY VERSION - prefix catalogue number with:

TGT - AutoTest e.g. TGT 19890L etc.

Add 0.3kg to weights listed.

▲ Emergency version not available

ACCESSORY

DESCRIPTION	CAT. No.	APPROX. kg
Wire suspension kit (3m length)	GT 19906	0.05



Suspended version