


JUBILEE-XL



PHOTOMETRIC GUIDE




Luminaire Lumen Output:

14W = 2635lm
 18W = 3210lm
 21W = 3625lm
 30W = 5105lm
 31W = 5315lm
 43W = 7120lm*


* Exceeds EN12464-1 / LG7 3000 cd/m² limit

DIMENSIONS

1200 versions

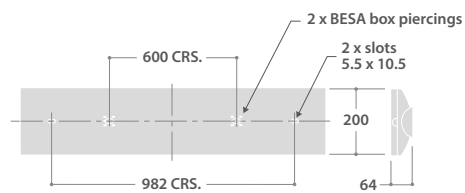

1500 versions

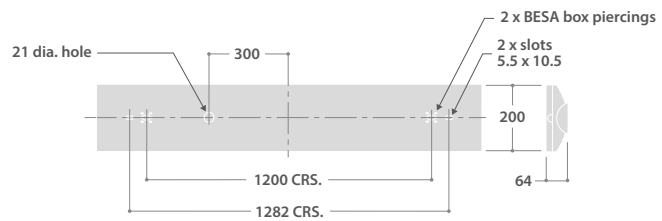



Smart version

LED SURFACE MOUNTED CONTROLLER LUMINAIRES



SPECIFICATION

- Steel body finished full polyester, non-yellowing white
- 'Satin-Glo' polycarbonate controller provides high angle illuminance
- Sophisticated micro prism lens
- Excellent optical design for EN12464-1 / LG7 (<3000 cd/m² @ 65°) compliance
- Smart versions with intelligent lighting control
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	67K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	151.9

For LED characteristics explanation see www.thorlux.com/led-guide

SmartScan Configurations



Find out more at www.thorlux.com/smartsan

RANGE

	NOMINAL SIZE (mm)	LED	CAT. No.	LENGTH (mm)	APPROX. kg	CIRCUIT
SMART	1200	18W	JUB 16949	1195	5.1	D/SS
		31W	JUB 16950		5.1	D/SS
		14W	JUB 19631		6.6	D/SS
	1500	21W	JUB 16693	1495	6.6	D/SS
		30W	JUB 16694		6.6	D/SS
		43W	JUB 16695		6.6	D/SS
STANDARD	1200	18W	JUB 16951	1195	5.0	L/A
		31W	JUB 16952		5.0	L/A
		14W	JUB 19632		6.5	L/A
	1500	21W	JUB 16697	1495	6.5	L/A
		30W	JUB 16698		6.5	L/A
		43W	JUB 16699		6.5	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming (LED) / A - dimming (DALI) e.g. **JUB 16949SS** etc.

EMERGENCY VERSION - prefix catalogue number with:

EJB - Emergency (Not available when selecting the 'SS' suffix)

TJB - AutoTest

WJB - SmartScan (Only available when selecting the 'SS' suffix)
e.g. **WJB 16949SS** etc.

Add 0.3kg to weights listed