



Smart External version



LED AREA FLOODLIGHTS

IP66 IK10 UK CA CE LED

WINDAGE - 0.06m²

SPECIFICATION

- Strong high-pressure die-cast aluminium top and column mount finished full polyester powder coat silver (RAL9006)
- High-impact UV stabilised polycarbonate cover rated IK10
- Integral high efficiency driver
- Extremely efficient and long system life up to 100,000 hours
- Fits 76mm columns as standard (60mm to special order)
- Fitted with 6m flying lead
- Smart External versions with intelligent lighting control for use up to 6 metres mounting height
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Photocell option
- Zero upward light
- Fitted with 4000K LEDs

Zero Upward Light

Help reduce light pollution and protect the night sky by selecting zero upward light luminaires


LED CHARACTERISTICS

CRI	70+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L90/B10
PROTECTION	-
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.95

LL/CW **104.3**


For LED characteristics explanation see www.thorlux.com/led-guide

PHOTOMETRIC GUIDE



Luminaire Lumen Output:
52W = 6360lm
78W = 9155lm

DIMENSIONS

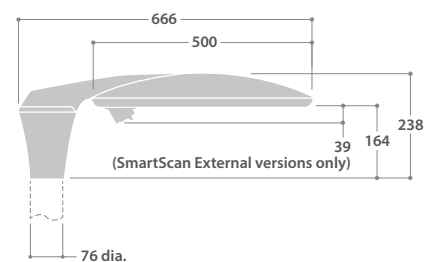

RANGE

	LED	CAT. No.	APPROX. kg
SMART EXTERNAL	52W	JUN 17676SS	8.9
	78W	JUN 17677SS	8.9
STANDARD	52W	JUN 17678L	8.8
	78W	JUN 17679L	8.8

CIRCUIT TYPE -

SMART EXTERNAL SS - SmartScan
STANDARD L - non-dimming (LED)

SmartScan Configurations



Find out more at www.thorlux.com/smartsan

OPTIONS

DESCRIPTION	SUFFIX	EXAMPLE
Photocell (standard versions only)	PC	JUN 17678LPC