

KANBY EVO

SCREW-ON END CAPS
With concealed fixings and provision for conduit entry

UPLIGHTING FEATURE
Diffuser designed to uplight the ceiling


INTEGRAL SMARTSCAN OPTION
Increased energy efficiency and wireless status reporting

HIGH EFFICIENCY LED TECHNOLOGY
OPAL LOW GLARE
133 138
LL/CW LL/CW


OPAL DIFFUSER VERSION
Homogeneously lit

NANOPRISM OPTIC VERSION
Low glare

DIMENSIONS

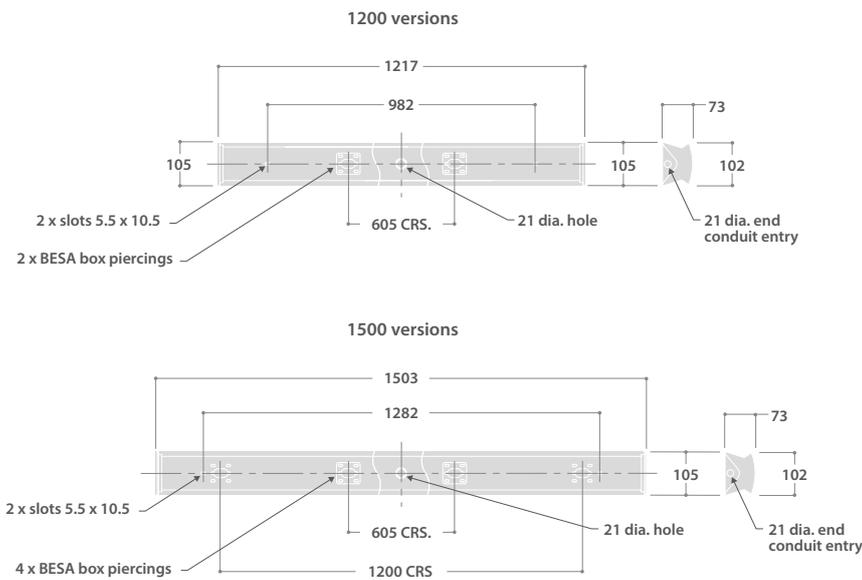

PHOTOMETRIC GUIDE

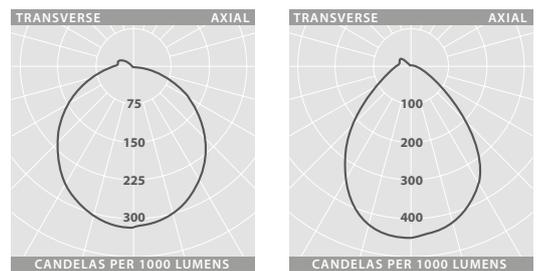

OPAL VERSION
Luminaire Lumen Output:
15W = 2190lm
26W = 3705lm
22W = 3330lm
36W = 5270lm
43W = 6250lm

LOW GLARE VERSION
Luminaire Lumen Output:
15W = 2280lm
26W = 3860lm
22W = 3470lm
36W = 5490lm
43W = 6510lm

* Exceeds EN12464-1 / LG7 3000 cd/m² limit



NARROW BODY LED CONTROLLER LUMINAIRES



SPECIFICATION

- Steel body finished full polyester non-yellowing satin white (RAL 9016)
- Polycarbonate diffuser: Carefully controlled nanoprism optic version for EN12464-1 / LG7 (<3000 cd/m² @ 65°) compliance or opal version
- Polycarbonate screw-on end caps with concealed fixings
- Fire-retardant external plastic parts
- Designed to exclude dust, dirt and flies
- Smart versions with intelligent lighting control
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	67K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.9
LL/CW	138.8

For LED characteristics explanation see www.thorlux.com/led-guide

SmartScan Configurations



Find out more at www.thorlux.com/smartsan

RANGE

	NOMINAL SIZE (mm)	LED	OPAL VERSION	LOW GLARE VERSION	APPROX. kg	CIRCUIT
SMART	1200	15W	KE 18943	KE 18951	3.9	D/SS
		26W	KE 18944	KE 18952	3.9	D/SS
	1500	22W	KE 18948	KE 18956	4.2	D/SS
		36W	KE 18949	KE 18957	4.2	D/SS
		43W	KE 18950	KE 18958	4.2	D/SS
STANDARD	1200	15W	KE 18959	KE 18967	3.8	L/A
		26W	KE 18960	KE 18968	3.8	L/A
	1500	22W	KE 18964	KE 18972	4.1	L/A
		36W	KE 18965	KE 18973	4.1	L/A
		43W	KE 18966	KE 18974	4.1	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming / A - dimming (DALI) e.g. **KE 18943SS** etc.

EMERGENCY VERSION - prefix catalogue number with:

EKE - Emergency (Not available when selecting the 'SS' suffix)

TKE - AutoTest

WKE - SmartScan (Only available when selecting the 'SS' suffix)

e.g. **WKE 18943SS** etc.

Add 0.3kg to weights listed

ACCESSORY

DESCRIPTION	CAT. No.	APPROX. kg
Wire suspension kit (3m length)	KE 18195	0.05