



CIRCULAR RECESSED DOWNLIGHTS



SPECIFICATION

- High pressure die-cast aluminium bezel finished full polyester satin white
- Black and silver finishes available to special order*
- Broad distribution reflector
- Sprung suspension arms for rapid installation
- Supplied with remote gear unit fitted with 2m lead
- Luminaires can be supplied pre-wired with a purpose made 1m connection lead for plugging directly into the Smart Hub
- 3000K and 4000K versions

* Minimum order quantity applies

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	3000/4000K
RATED LIFE (HOURS)	50K - L70/B10
PROTECTION	-
DRIVER EFFICIENCY	>80%
REPLACEABLE	-
POWER FACTOR	>0.9
LL/CW	108.3

For LED characteristics explanation see www.thorlux.com/led-guide


RANGE

LED	CAT. No.	APPROX. kg	CIRCUIT
17W - 3000K	NEM 18028	1.4	L/A
26W - 3000K	NEM 18029	1.4	L/A
17W - 4000K	NEM 18030	1.4	L/A
26W - 4000K	NEM 18031	1.4	L/A

CIRCUIT TYPE - suffix catalogue number with:
L - non-dimming (LED) / **A** - dimming (DALI) e.g. **NEM 18028L** etc.


HUB VERSIONS - suffix catalogue number with **SHL** e.g. **NEM 18028LSHL**

PHOTOMETRIC GUIDE



LED	3000K (lm)	4000K (lm)
17W	2015	2165
26W	2870	3085

DIMENSIONS

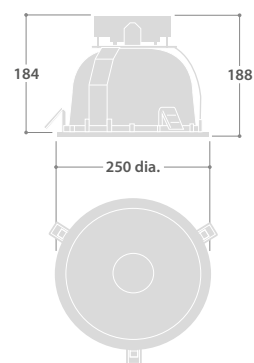

Cut-out - 235 dia.
 Minimum ceiling void - 240

