




DIMENSIONS



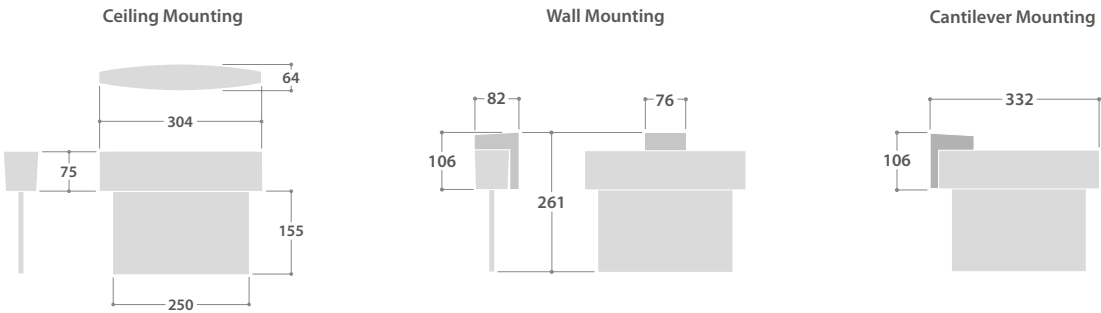

ARCHITECTURAL SURFACE MOUNTED LED EXIT SIGNS



SPECIFICATION

- Polycarbonate body finished matt silver
- Acrylic legend panel
- Low power consumption (4W total)
- Extremely long LED lifetime, up to 100,000 hours
- Very easy battery compartment access
- Ceiling mounted or optional kit for wall and cantilever mounting
- 26m maximum viewing distance in accordance with BS EN 1838
- Three hour, maintained emergency operation
- Choice of legends

SmartScan Configurations




Find out more at www.thorlux.com/smartscan

RANGE

ISO 7010 LEGEND	CAT. No	EURO LEGEND	CAT. No	APPROX. kg	TYPE
AutoTest					
A	TSV 15245	F	TSV 13626	1.0	Maintained
B	TSV 15246	G	TSV 13627	1.0	Maintained
C	TSV 15247	H	TSV 13628	1.0	Maintained
D	TSV 15248	J	TSV 13629	1.0	Maintained
E	TSV 15249			1.0	Maintained
SmartScan					
A	WSV 15245	F	WSV 13626	1.0	Maintained
B	WSV 15246	G	WSV 13627	1.0	Maintained
C	WSV 15247	H	WSV 13628	1.0	Maintained
D	WSV 15248	J	WSV 13629	1.0	Maintained
E	WSV 15249			1.0	Maintained

LEGEND OPTIONS

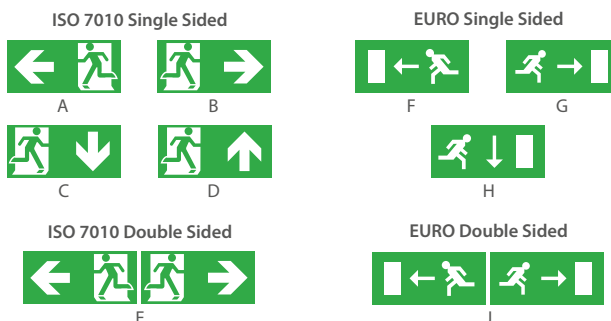

SPARES

DESCRIPTION	CAT. No.	APPROX. kg
Nickel Metal Hydride (NiMH) battery	EMB 617	0.15

End of life SmartScan batteries can be returned to Thorlux for recycling.

OPTIONAL MOUNTING KIT

DESCRIPTION	CAT. No.	APPROX kg
Wall or cantilever mounting kit	SV 13630	0.2

5
YEAR

BATTERY
WARRANTY*

* SmartScan
versions only