

SORTIE




RANGE

ISO 7010 LEGEND	CAT. No	EURO LEGEND	CAT. No	APPROX. kg	TYPE
Emergency					
A	ESE 15250	E	ESE 13621	1.3	Maintained
B	ESE 15251	F	ESE 13622	1.3	Maintained
C	ESE 15252	G	ESE 13623	1.3	Maintained
D	ESE 15253			1.3	Maintained
AutoTest					
A	TSE 15250	E	TSE 13621	1.3	Maintained
B	TSE 15251	F	TSE 13622	1.3	Maintained
C	TSE 15252	G	TSE 13623	1.3	Maintained
D	TSE 15253			1.3	Maintained

SPARES

DESCRIPTION	CAT. No.	APPROX. kg
Nickel Metal Hydride (NiMH) battery	EMB 617	0.15

LEGEND OPTIONS

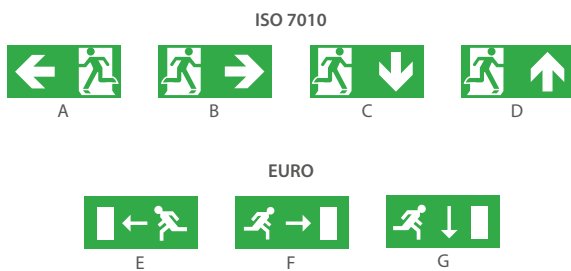

LED EXIT SIGNS



SPECIFICATION

- Clear cover and off-white body in polycarbonate
- 25.6m maximum viewing distance in accordance with BS EN 1838
- Three hour, maintained emergency operation
- Low power consumption (1W total)
- Extremely long LED lifetime, up to 100,000 hours
- Emergency and AutoTest versions
- Stylish and robust
- Choice of legends

DIMENSIONS

