





ADJUSTABLE RECESSED ACCENT SPOTLIGHT LUMINAIRES



SPECIFICATION

- High pressure die-cast aluminium bezel and body finished full polyester satin white
- 46° beam angle version
- 355° azimuth adjustment
- 85° vertical adjustment
- Sprung suspension arms for rapid installation
- Supplied with remote gear unit fitted with 0.5m lead
- Luminaires can be supplied pre-wired with a purpose made 1m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications
- CRI 80 available*
- 3000K and 4000K versions

* Minimum order quantity applies

LED CHARACTERISTICS

CRI	90+
COLOUR TEMPERATURE	3000/4000K
RATED LIFE (HOURS)	60K - L70/B10
PROTECTION	-
DRIVER EFFICIENCY	>80%
REPLACEABLE	-
POWER FACTOR	>0.9
LL/CW	102.5

For LED characteristics explanation see www.thorlux.com/led-guide


RANGE

LED	46° BEAM	APPROX. kg	CIRCUIT
9W - 3000K	SWV 19734	1.5	L/A
9W - 4000K	SWV 19735	1.5	L/A


CIRCUIT TYPE - suffix catalogue number with:
L - non-dimming (LED) / A - dimming (DALI) e.g. SWV 19734L etc.

HUB VERSIONS - suffix catalogue number with SHL e.g. SWV 19735SHL

DIMENSIONS

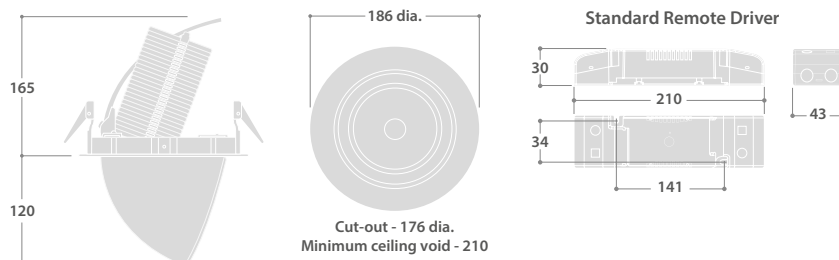

PHOTOMETRIC GUIDE



46° BEAM

LED	3000K (lm)	4000K (lm)
9W	1140	1230