




IP65 Version



IP20 Version

CIRCULAR RECESSED DOWNLIGHTS



SPECIFICATION

- High pressure die-cast aluminium bezel finished full polyester satin white
- Injection moulded, black, anti-glare reflector bezel
- 38° beam angle versions
- IP65 versions with frosted glass
- Sprung suspension arms for rapid installation
- Supplied with remote gear unit fitted with 2m lead
- Luminaires can be supplied pre-wired with a purpose made 1m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications
- CRI 80 available*
- 3000K and 4000K versions

* Minimum order quantity applies

LED CHARACTERISTICS

CRI	90+
COLOUR TEMPERATURE	3000/4000K
RATED LIFE (HOURS)	50K - L70/B10
PROTECTION	-
DRIVER EFFICIENCY	>80%
REPLACEABLE	-
POWER FACTOR	>0.9

LL/CW **91.7**

For LED characteristics explanation see www.thorlux.com/led-guide


RANGE

LED	IP20 38° BEAM	APPROX. kg	IP65 FROSTED GLASS	APPROX. kg	CIRCUIT
14W - 3000K	TEG 18036	1.0	TEG 18044	0.9	L/A
20W - 3000K	TEG 18037	1.0	TEG 18045	0.9	L/A
14W - 4000K	TEG 18038	1.0	TEG 18046	0.9	L/A
20W - 4000K	TEG 18039	1.0	TEG 18047	0.9	L/A


CIRCUIT TYPE - suffix catalogue number with:
L - non-dimming (LED) / A - dimming (DALI) e.g. **TEG 18036L** etc.

HUB VERSIONS - suffix catalogue number with **SHL** e.g. **TEG 18036LSHL**

DIMENSIONS

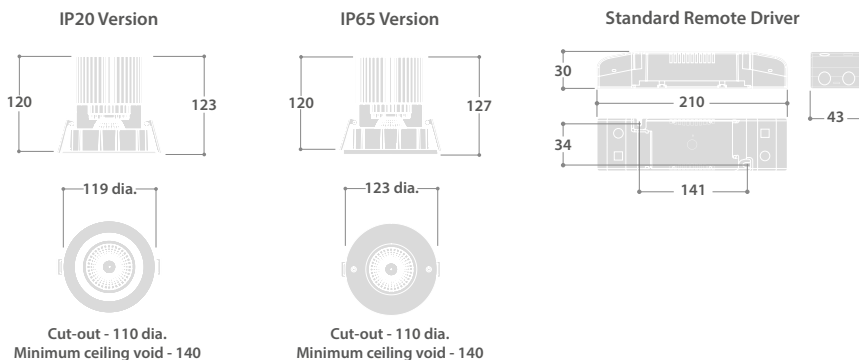

PHOTOMETRIC GUIDE

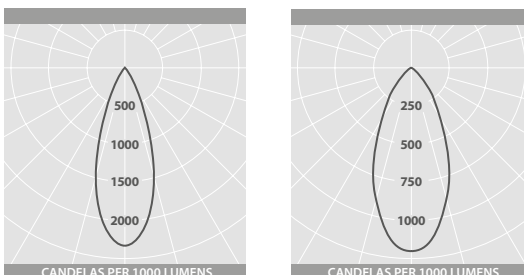

38° BEAM

LED	3000K (lm)	4000K (lm)
14W	1430	1540
20W	1960	2110

IP65 FROSTED GLASS

LED	3000K (lm)	4000K (lm)
14W	1270	1365
20W	1705	1835