

# GRAVITY

GRAVITY is the new magnetic system of FLEX collection. A versatile and distinctive galaxy of graphic elements capable of enhancing any environment and providing a focal lighting effect. Installed magnetically with a mechanical extra security feature. Offered for trimless, ceiling and pendant mounting, linear units use a 48V power supply and allow the integration of multiple solutions, installed through magnetic and mechanical fixing, meeting different interior needs. Adjustable spots emphasise any setting due to maximum flexibility and the anti-glare retracted lens for accent or diffuse lighting. Linear modules are proposed with an opal screen for homogeneous and welcoming lighting. For high visual comfort and optimal glare control over the entire surface, the system is completed by UGR<19 units: recessed or fold, respectively for direct or adjustable light emission. GRAVITY can be installed individually or in multiple configurations, creating geometric figures with 90° angles.



SPOT 3W | 2700K - 38°

LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 3W                                         |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 2700K                                      |
| Luminous flux     | 137lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø2,5x18,4x10,6                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


Codes

MFLE5201746DAN

Structure

black

Certificazioni

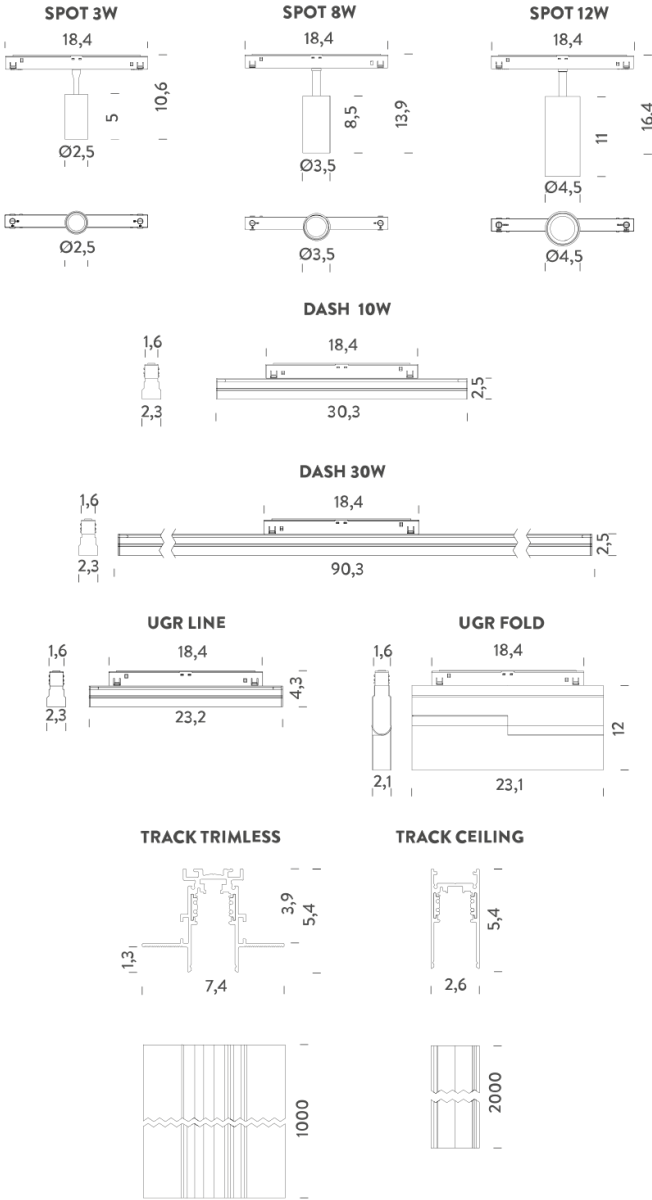

# SPOT 3W | 3000K - 38°

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 3W                                         |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 3000K                                      |
| Luminous flux     | 185lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø2,5x18,4x10,6                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5201746WAN

## Structure

black

## Certificazioni

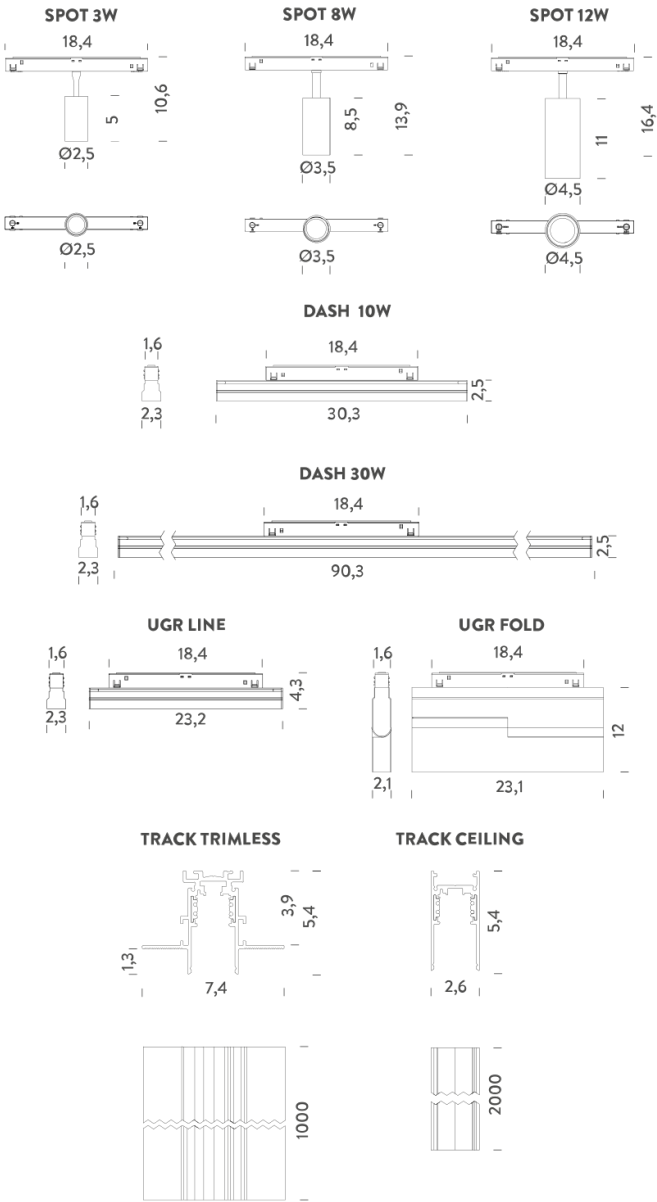

SPOT 8W | 2700K - 15°

LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 8W                                         |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 2700K                                      |
| Luminous flux     | 415lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø3,5x18,4x13,9                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


Codes

MFLE5201344DAN

Structure

black

Certificazioni

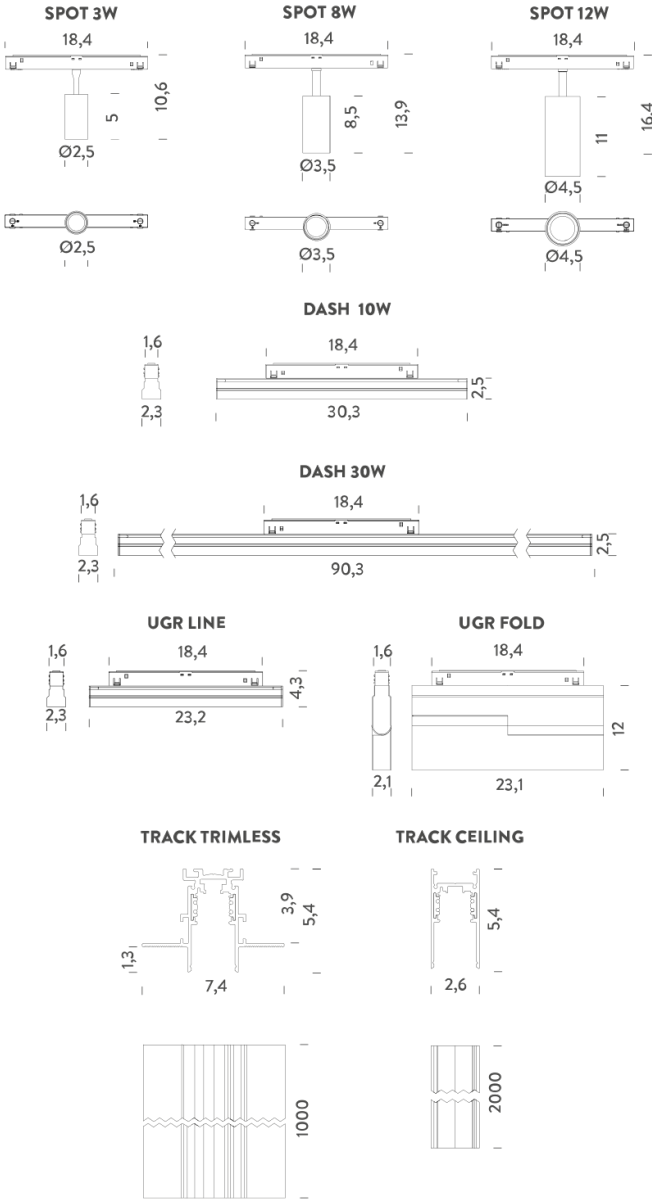

SPOT 8W | 2700K - 38°

LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 8W                                         |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 2700K                                      |
| Luminous flux     | 597lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø3,5x18,4x13,9                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


Codes

MFLE5201744DAN

Structure

black

Certificazioni

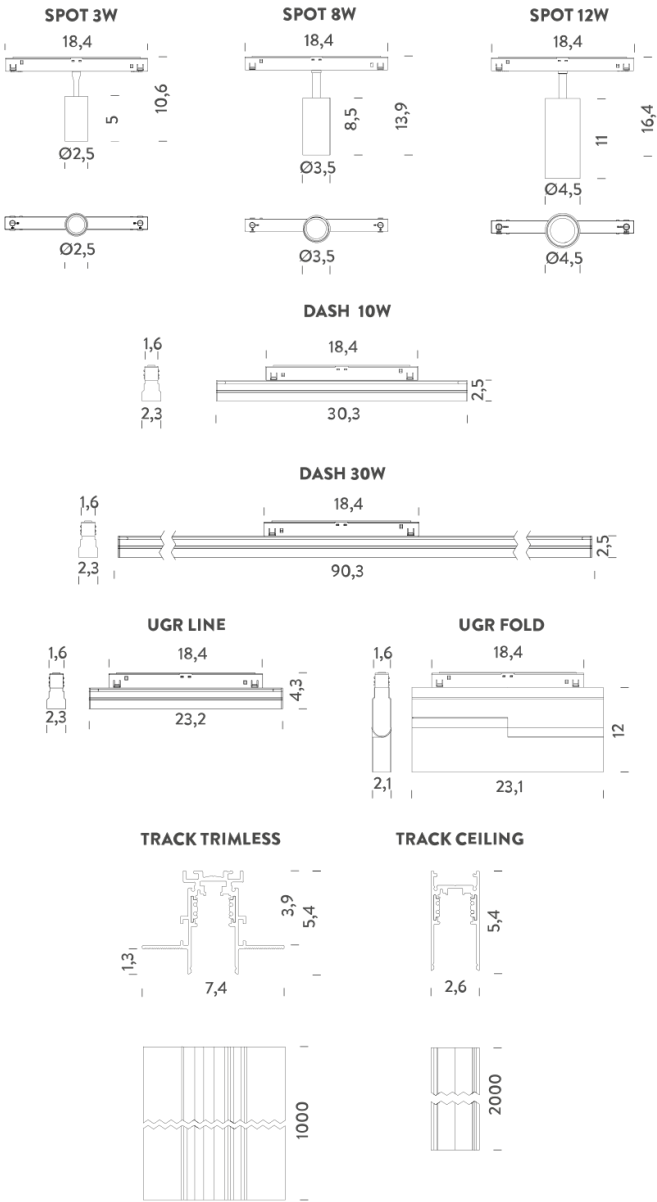

SPOT 8W | 3000K - 15°

LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 8W                                         |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 3000K                                      |
| Luminous flux     | 482lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø3,5x18,4x13,9                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


Codes

MFLE5201344WAN

Structure

black

Certificazioni

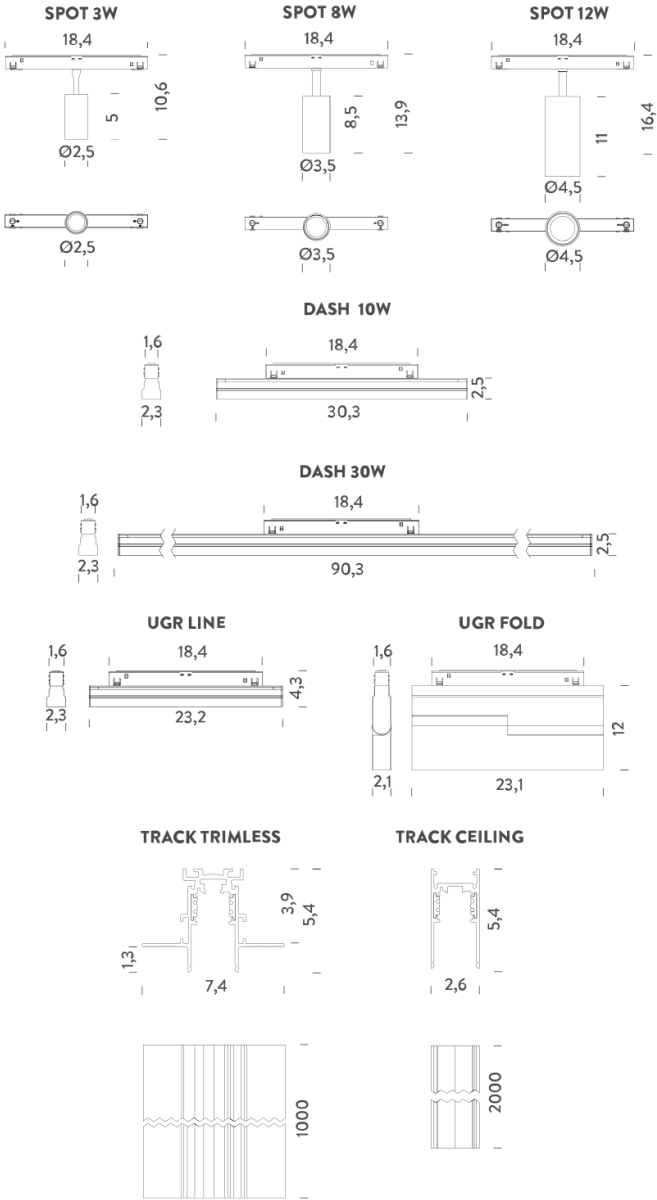

SPOT 8W | 3000K - 38°

LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 8W                                         |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 3000K                                      |
| Luminous flux     | 633lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø3,5x18,4x13,9                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


Codes

MFLE5201744WAN

Structure

black

Certificazioni

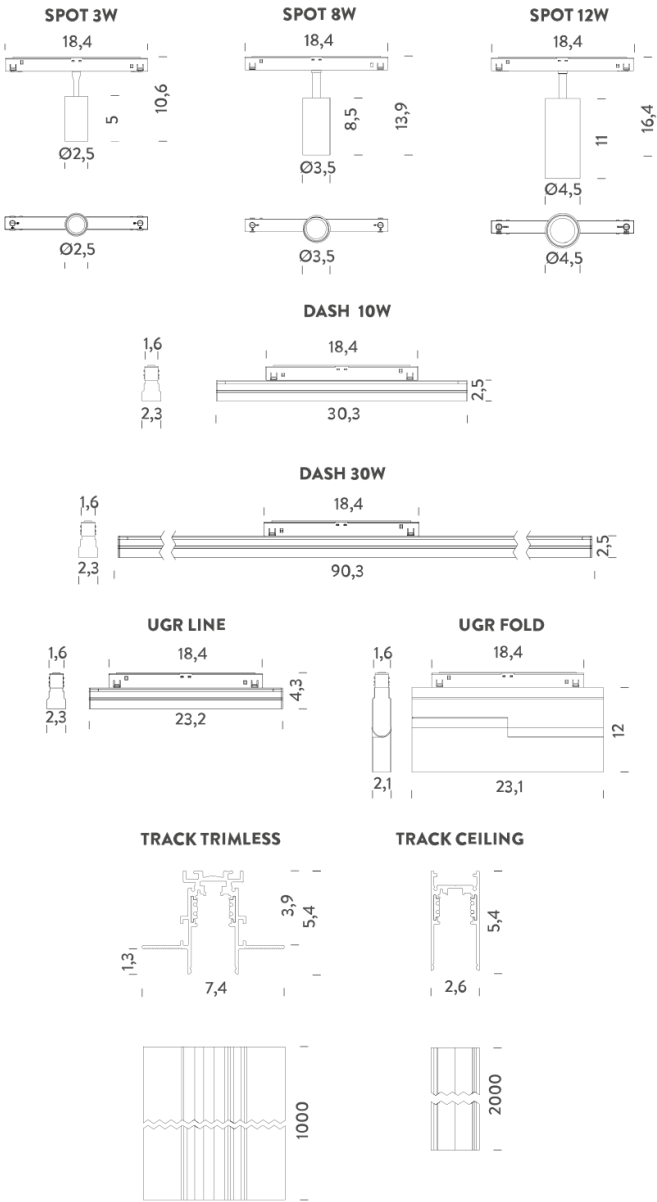

# SPOT 12W | 2700K - 15°

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 12W                                        |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 2700K                                      |
| Luminous flux     | 841lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø4,5x18,4x16,4                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5201345DAN

## Structure

black

## Certificazioni

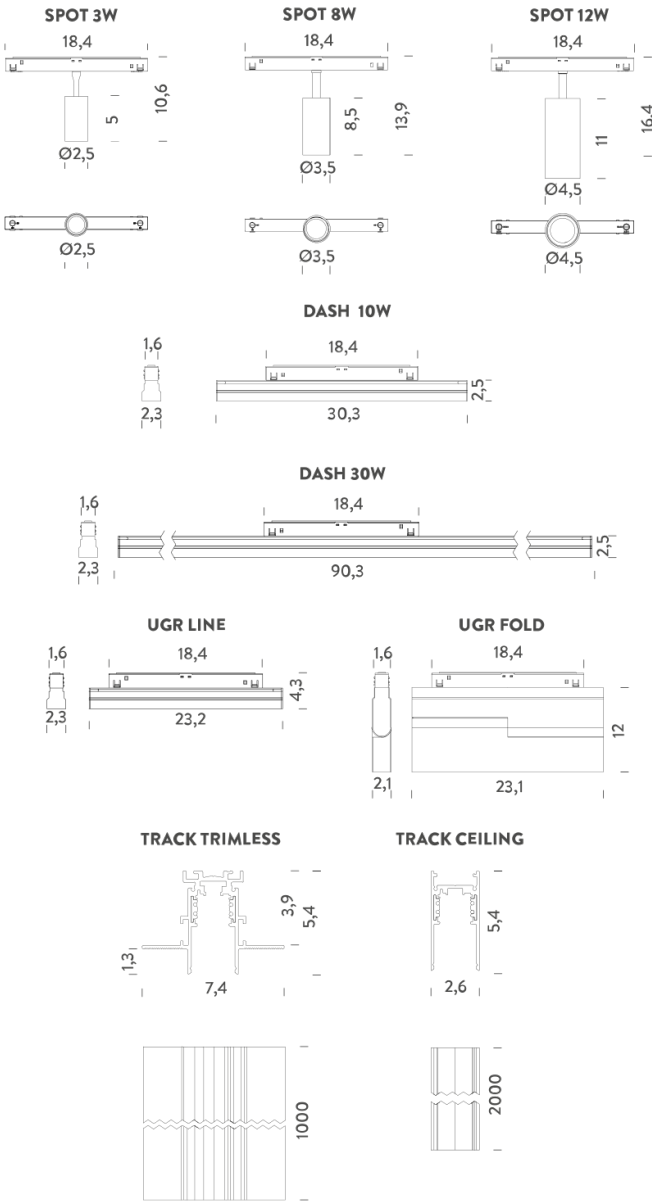

# SPOT 12W | 2700K - 38°

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 12W                                        |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 2700K                                      |
| Luminous flux     | 956lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø4,5x18,4x16,4                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5201745DAN

## Structure

black

## Certificazioni

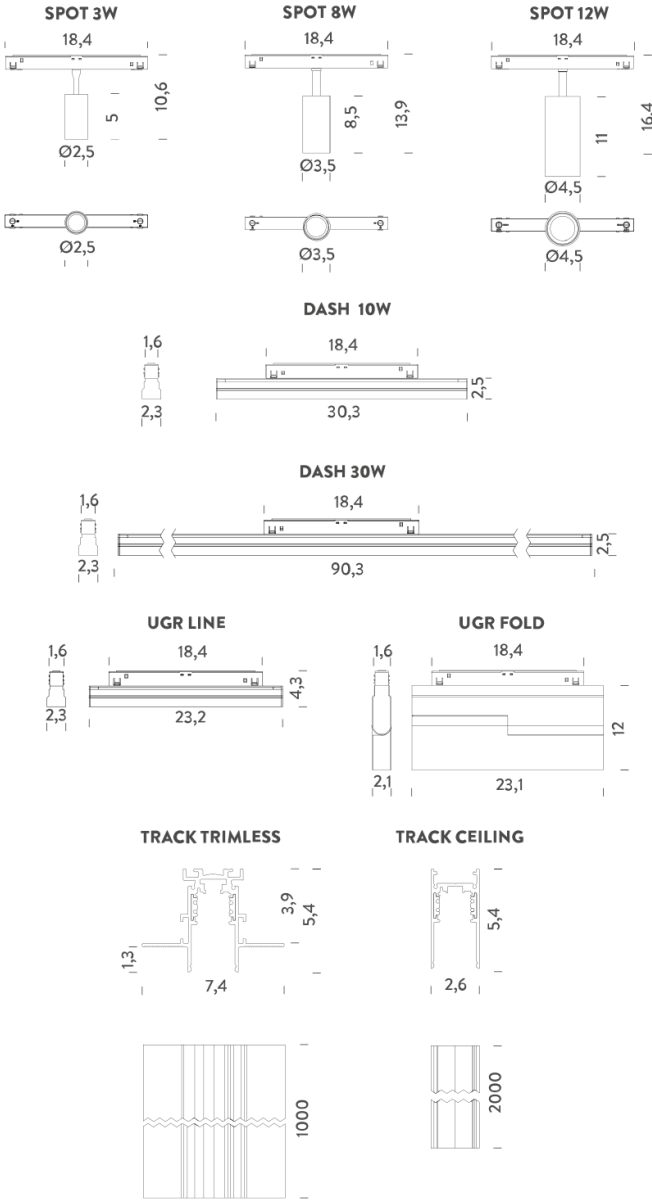

# SPOT 12W | 3000K - 15°

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 12W                                        |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 3000K                                      |
| Luminous flux     | 951lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø4,5x18,4x16,4                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5201345WAN

## Structure

black

## Certificazioni

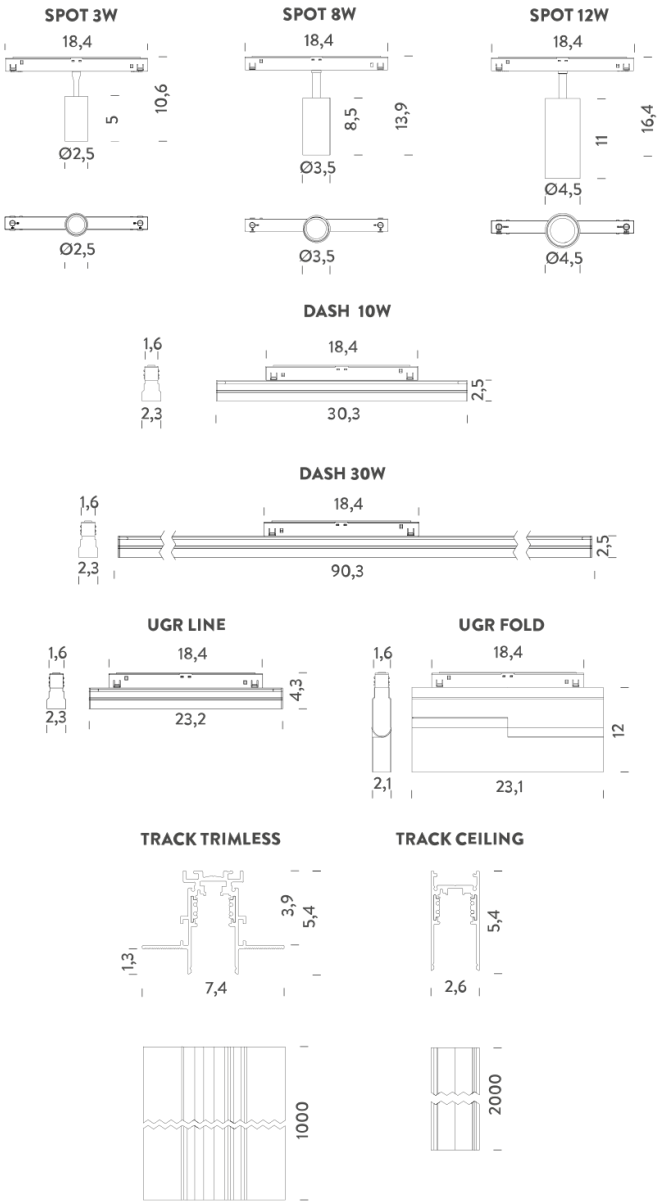

# SPOT 12W | 3000K - 38°

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 12W                                        |
| Emission          | orientable                                 |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 3000K                                      |
| Luminous flux     | 976lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | ø4,5x18,4x16,4                             |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5201745WAN

## Structure

black

## Certificazioni

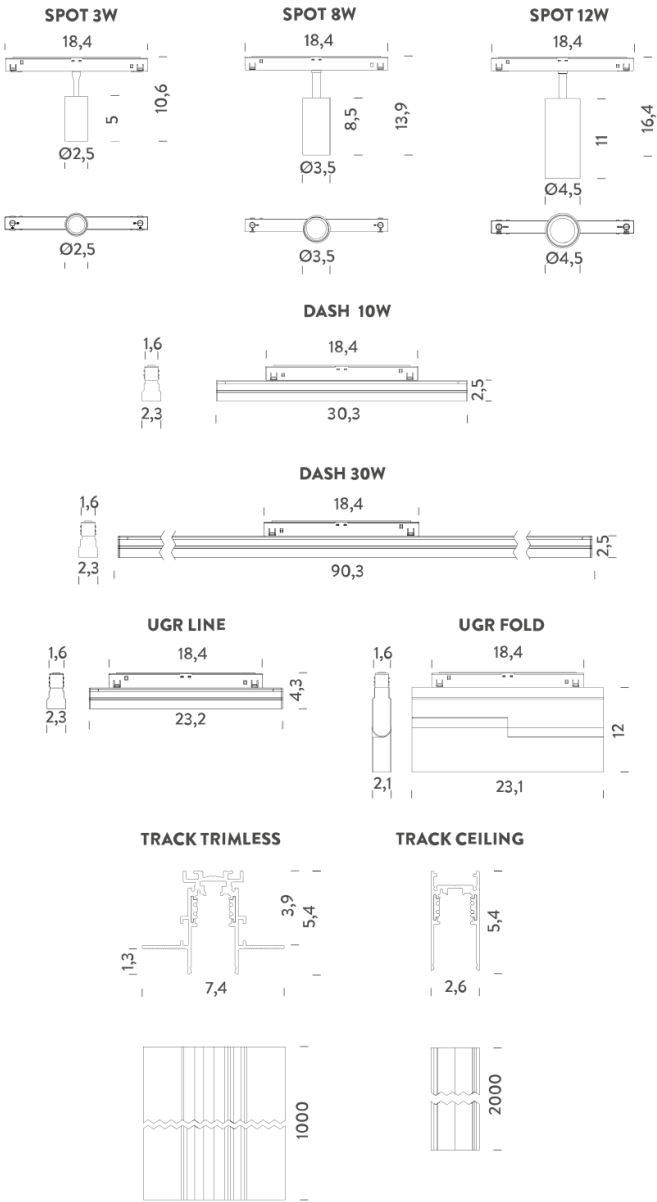

# UGR LINE | 2700K

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 15W                                        |
| Emission          | direct UGR<19                              |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 2700K                                      |
| Luminous flux     | 1146lm                                     |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | 23,2x4,3x18,4                              |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5302U48DAN

## Structure

black

## Certificazioni

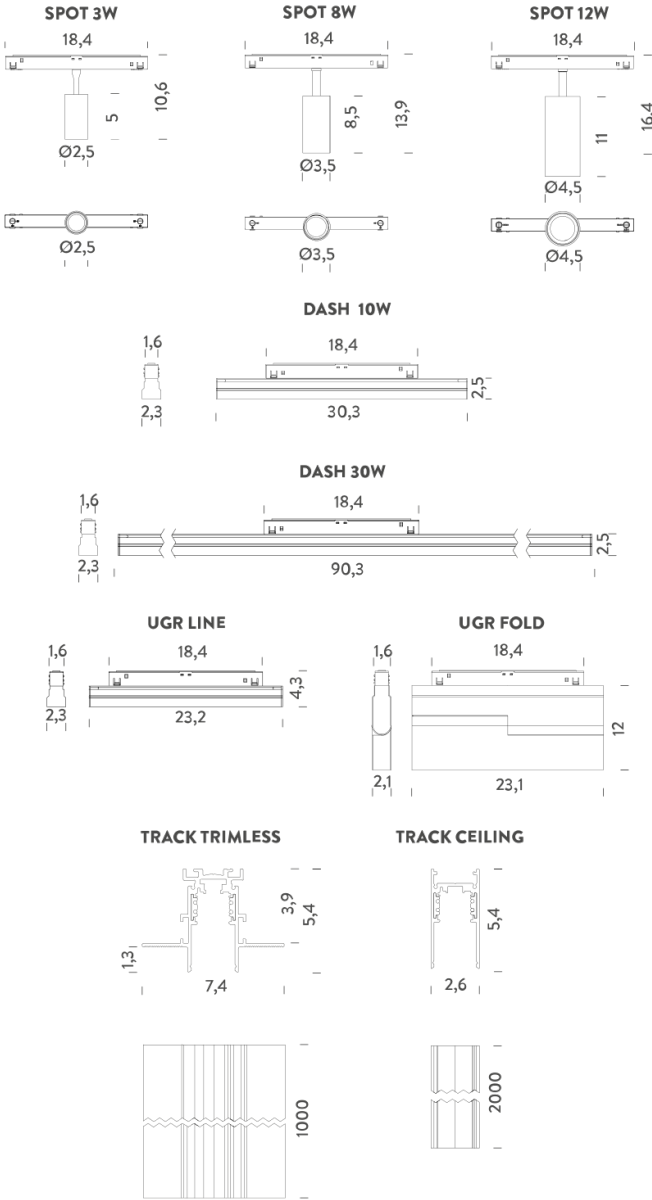

# UGR LINE | 3000K

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | LED                                        |
| Total power       | 15W                                        |
| Emission          | direct UGR<19                              |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 3000K                                      |
| Luminous flux     | 1165lm                                     |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | 23,2x4,3x18,4                              |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5302U48WAN

## Structure

black

## Certificazioni

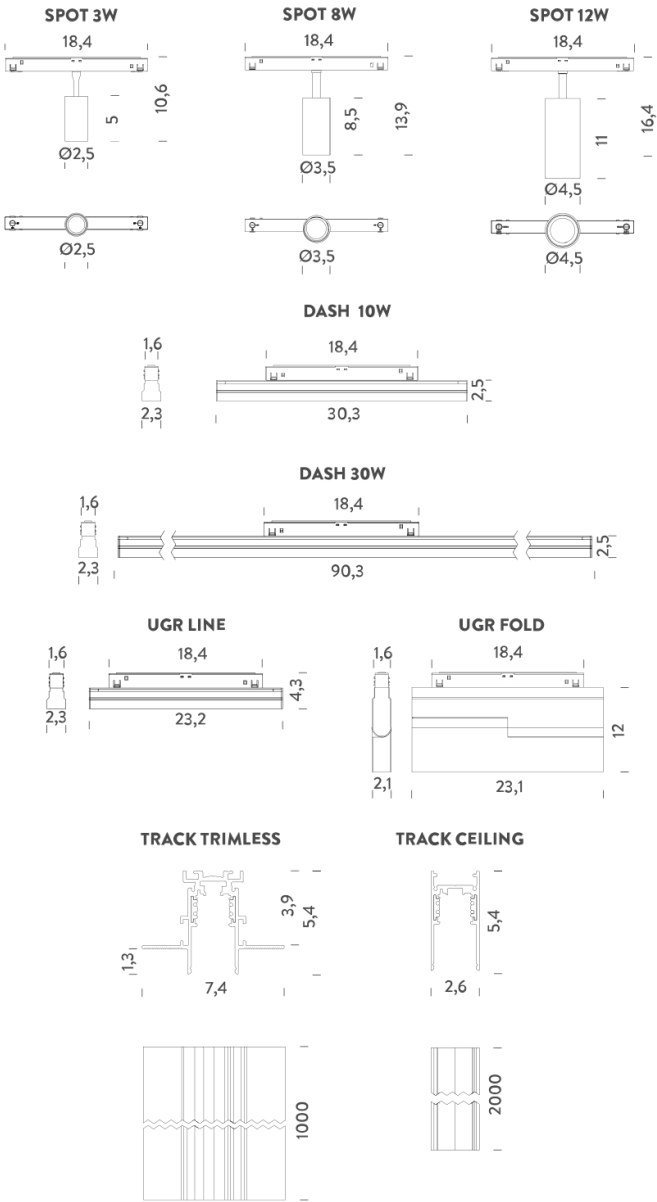

# UGR FOLD | 2700K


## LAMPING

|                       |                                            |
|-----------------------|--------------------------------------------|
| Source                | LED                                        |
| Total power           | 15W                                        |
| Emission              | orientable UGR<19                          |
| Switching             | DALI                                       |
| Tension               | 48V                                        |
| Color temperature     | 2700K                                      |
| Luminous flux         | 1397lm                                     |
| Typ CRI               | 90                                         |
| IP class              | 20                                         |
| Dimensions            | 23,1x12x18,4                               |
| Materials             | Aluminium + polycarbonate                  |
| Notes                 | driver, track and accessories not included |
| Customization options | asymmetric optic                           |

Codes  
MFLE5202T48DAN

Certificazioni

Structure  
black

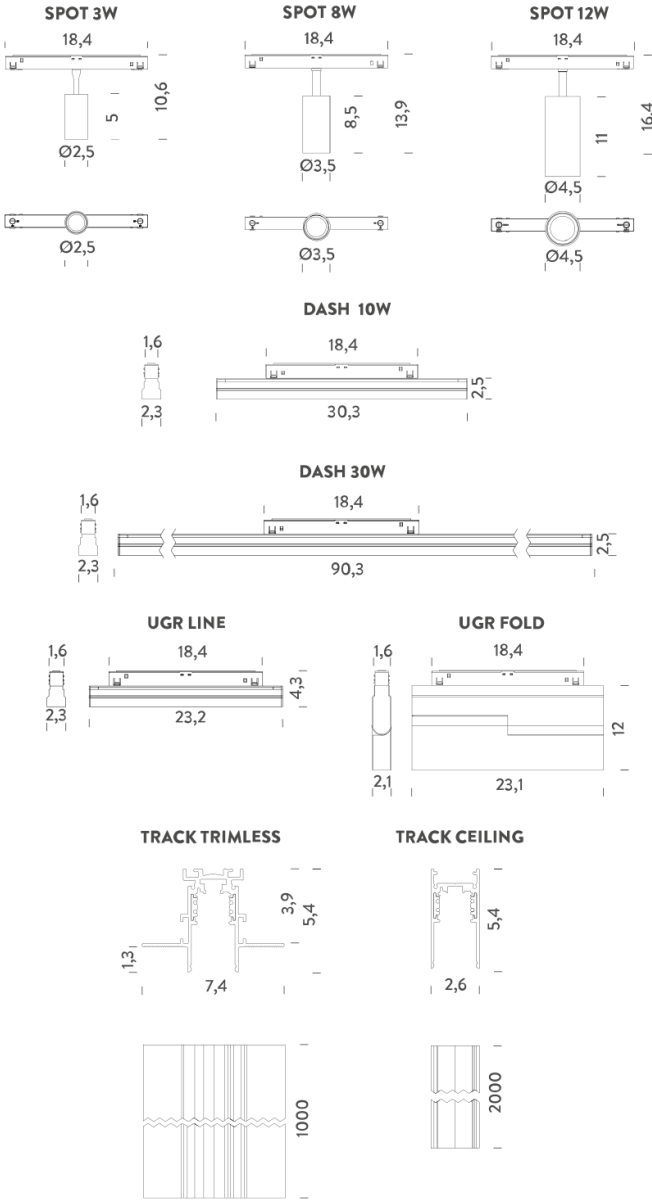

# UGR FOLD | 3000K

## LAMPING

|                       |                                            |
|-----------------------|--------------------------------------------|
| Source                | LED                                        |
| Total power           | 15W                                        |
| Emission              | orientable UGR<19                          |
| Switching             | DALI                                       |
| Tension               | 48V                                        |
| Color temperature     | 3000K                                      |
| Luminous flux         | 1550lm                                     |
| Typ CRI               | 90                                         |
| IP class              | 20                                         |
| Dimensions            | 23,1x12x18,4                               |
| Materials             | Aluminium + polycarbonate                  |
| Notes                 | driver, track and accessories not included |
| Customization options | asymmetric optic                           |


## Codes

MFLE5202T48WAN

## Certificazioni

## Structure

black

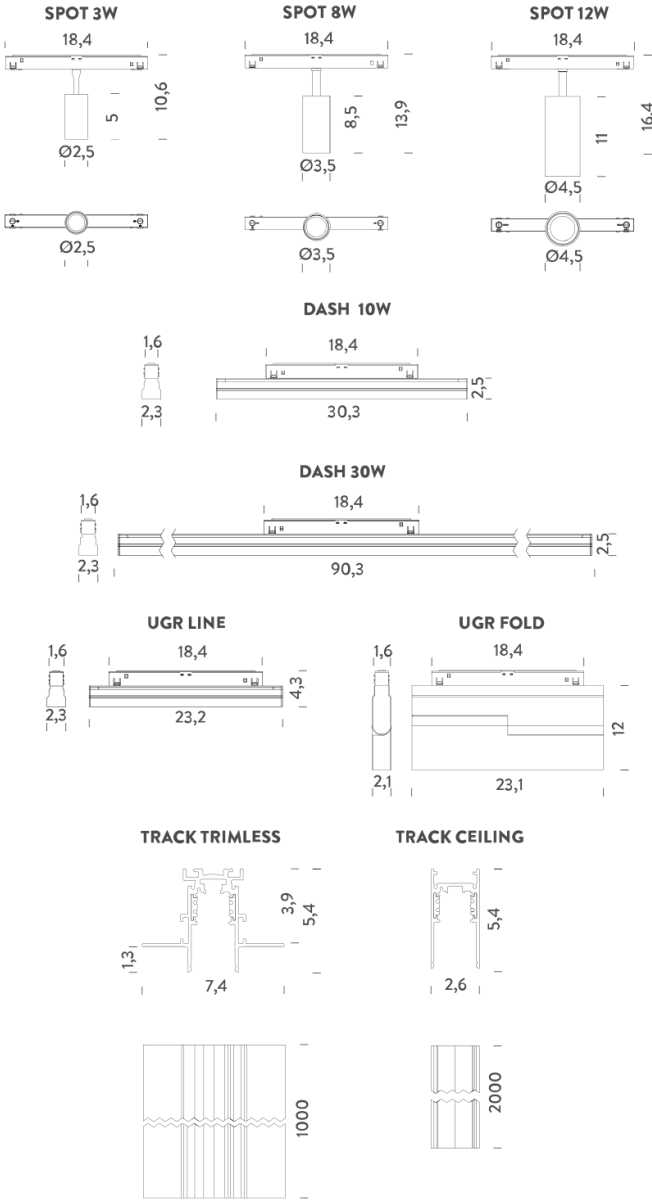

# DASH 10W | 2700K

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | Linear LED                                 |
| Total power       | 10W                                        |
| Emission          | diffused                                   |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 2700K                                      |
| Luminous flux     | 511lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | 30,3x2,3x2,5                               |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5303G47DAN

## Structure

black

## Certificazioni

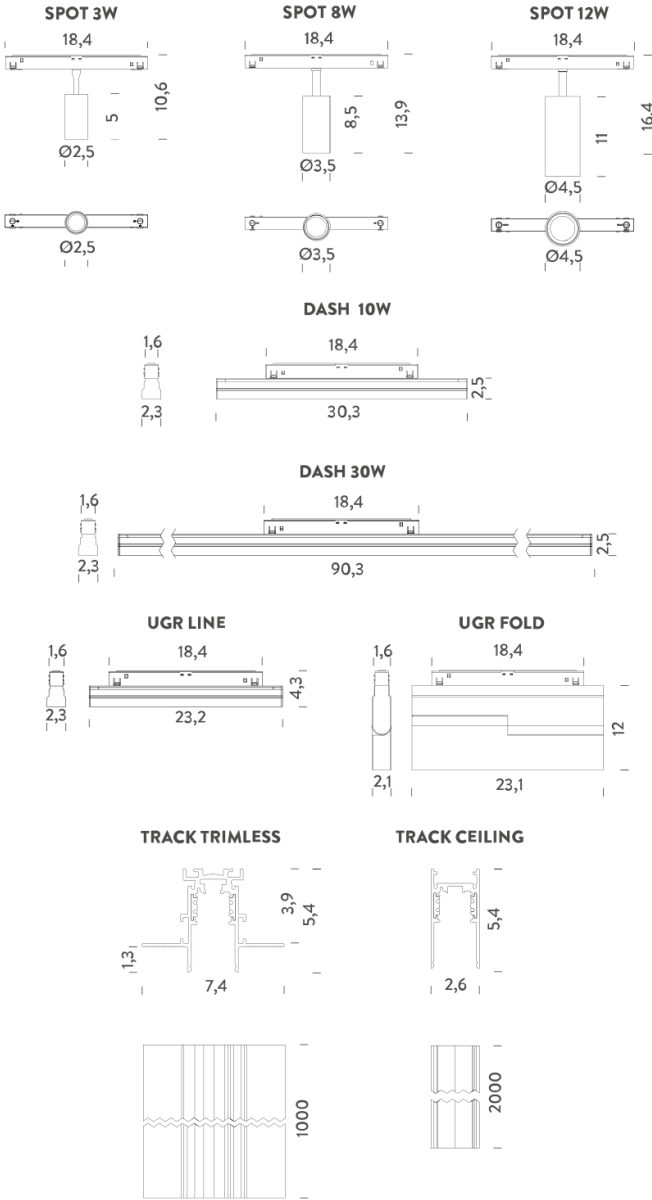

# DASH 10W | 3000K

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | Linear LED                                 |
| Total power       | 10W                                        |
| Emission          | diffused                                   |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 3000K                                      |
| Luminous flux     | 522lm                                      |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | 30,3x2,3x2,5                               |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5303G47WAN

## Structure

black

## Certificazioni

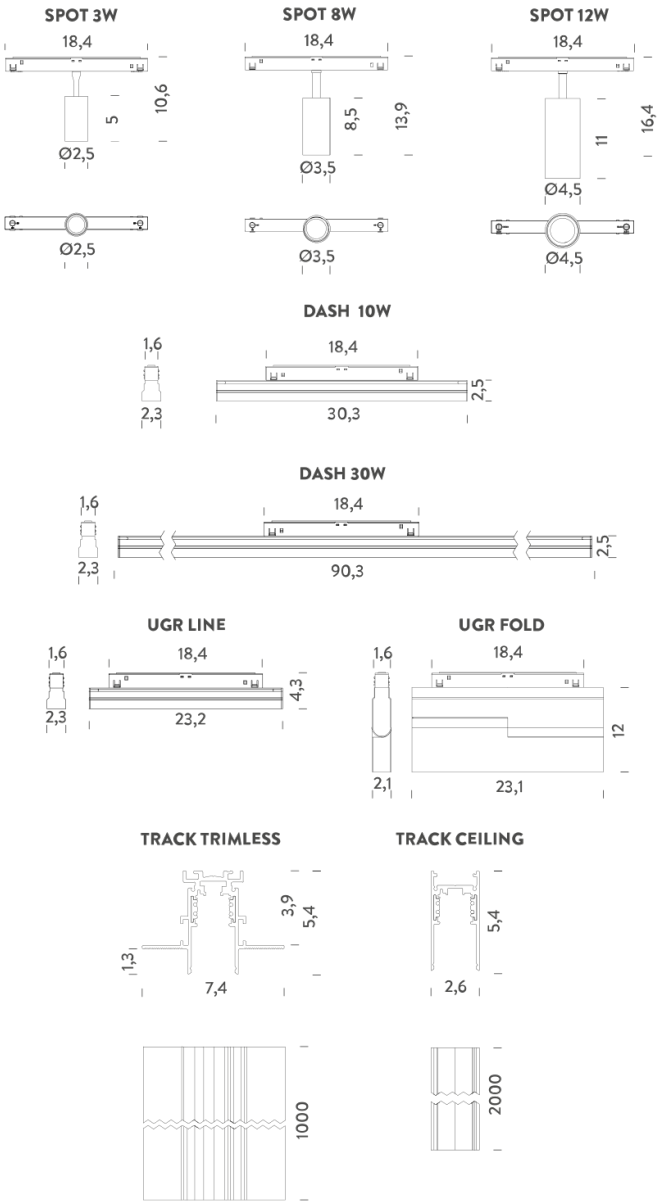

# DASH 30W | 2700K

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | Linear LED                                 |
| Total power       | 30W                                        |
| Emission          | diffused                                   |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 2700K                                      |
| Luminous flux     | 1530lm                                     |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | 90,3x2,3x2,5                               |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5309G47DAN

## Structure

black

## Certificazioni

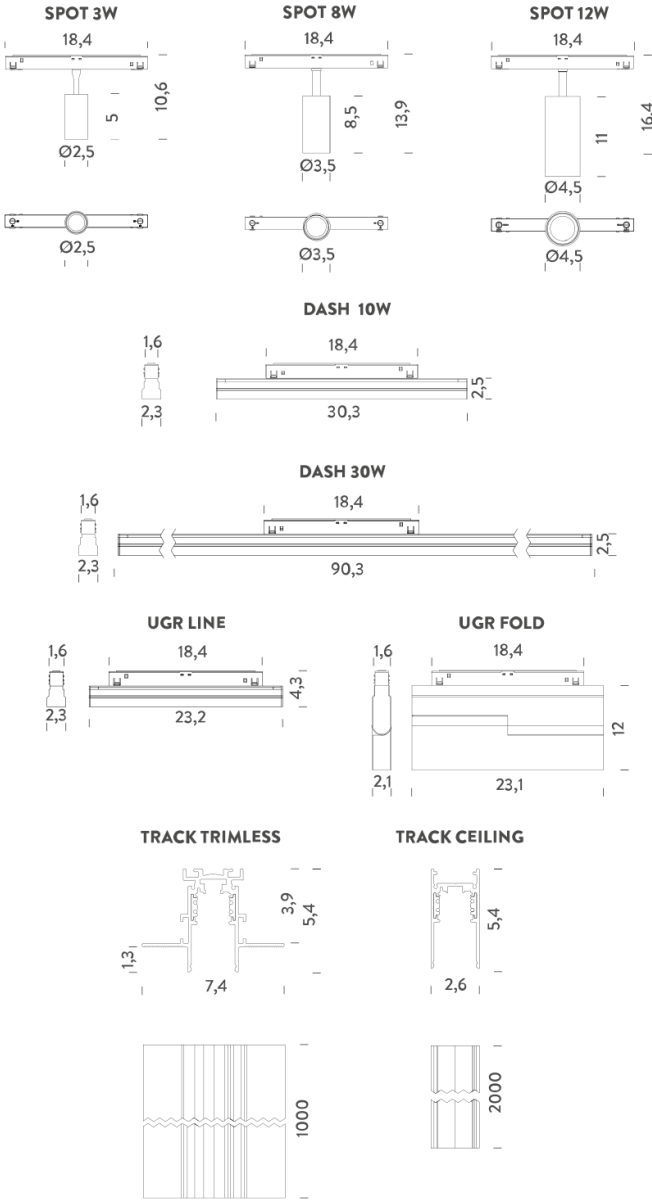

# DASH 30W | 3000K

## LAMPING

|                   |                                            |
|-------------------|--------------------------------------------|
| Source            | Linear LED                                 |
| Total power       | 30W                                        |
| Emission          | diffused                                   |
| Switching         | DALI                                       |
| Tension           | 48V                                        |
| Color temperature | 3000K                                      |
| Luminous flux     | 1768lm                                     |
| Typ CRI           | 90                                         |
| IP class          | 20                                         |
| Dimensions        | 90,3x2,3x2,5                               |
| Materials         | Aluminium + polycarbonate                  |
| Notes             | driver, track and accessories not included |


## Codes

MFLE5309G47WAN

## Structure

black

## Certificazioni

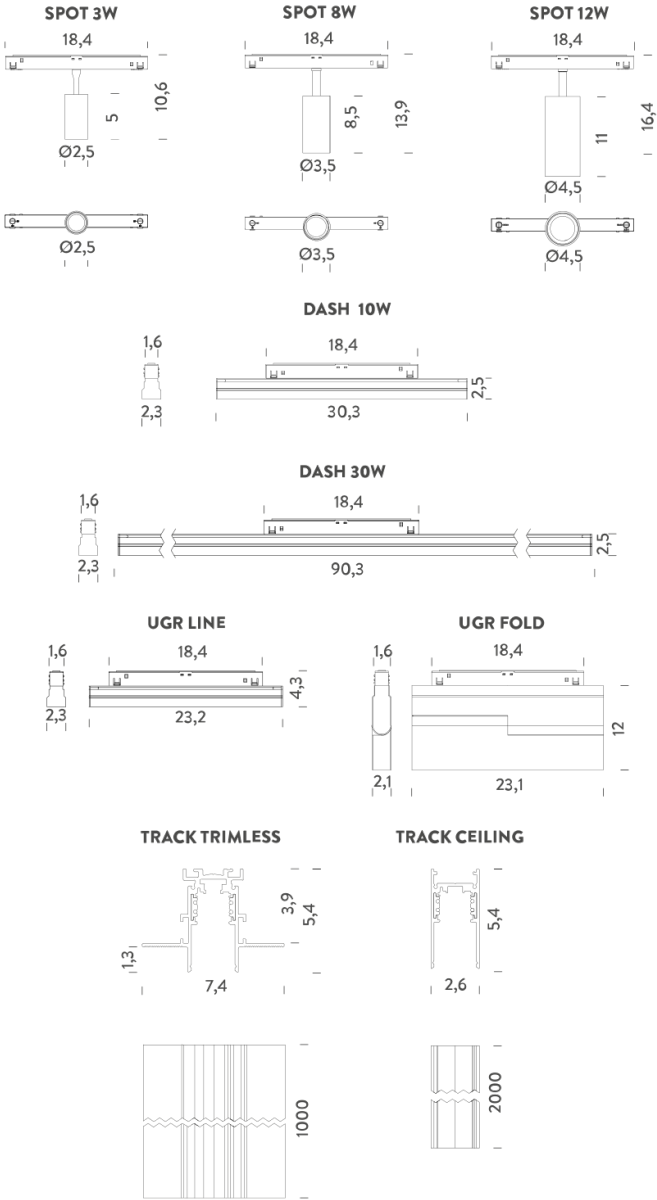

# TRACK CEILING | 1M

## LAMPING


|                       |                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------|
| Tension               | 48V                                                                                  |
| Dimensions            | 100x2,6x5,4                                                                          |
| Materials             | Aluminium                                                                            |
| Notes                 | pendant version available                                                            |
| Customization options | recessed trim version                                                                |
| Accessories           | Ceiling-Pendant Track 48V - accessories,   Ceiling-Trimless Track 48V - accessories, |

## Codes

MFLE0210NE

## Structure

black

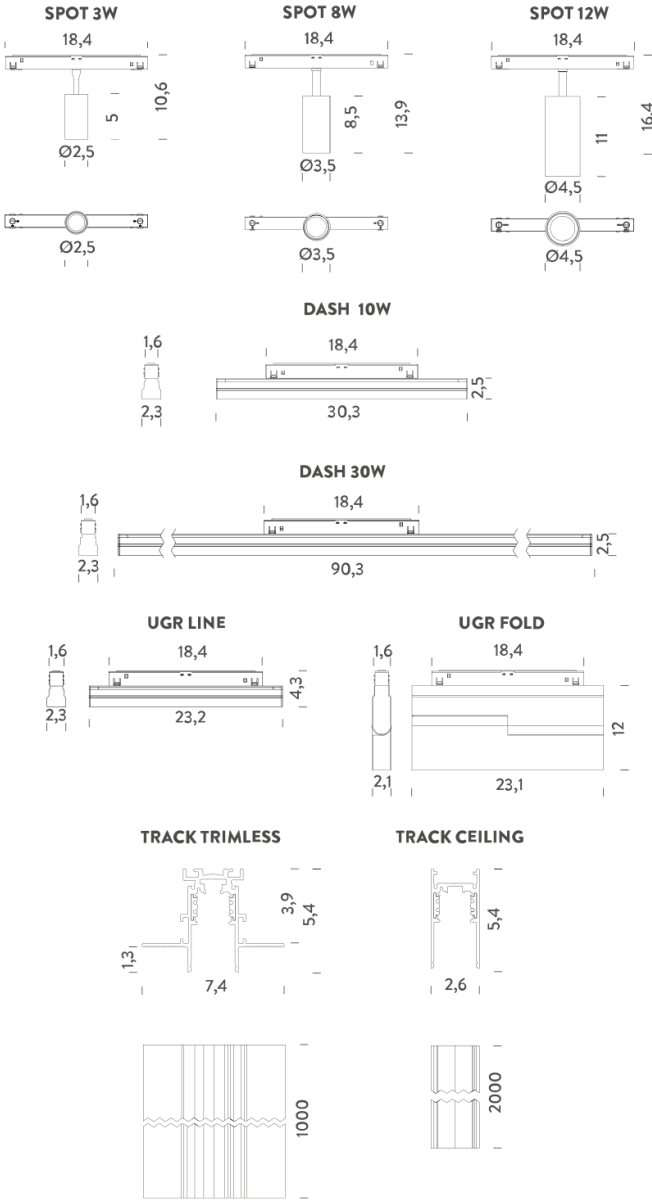

# TRACK CEILING | 2M

## LAMPING


|                       |                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------|
| Tension               | 48V                                                                                  |
| Dimensions            | 200x2,6x5,4                                                                          |
| Materials             | Aluminium                                                                            |
| Notes                 | pendant version available                                                            |
| Customization options | recessed trim version                                                                |
| Accessories           | Ceiling-Pendant Track 48V - accessories,   Ceiling-Trimless Track 48V - accessories, |

## Codes

MFLE0220NE

## Structure

black

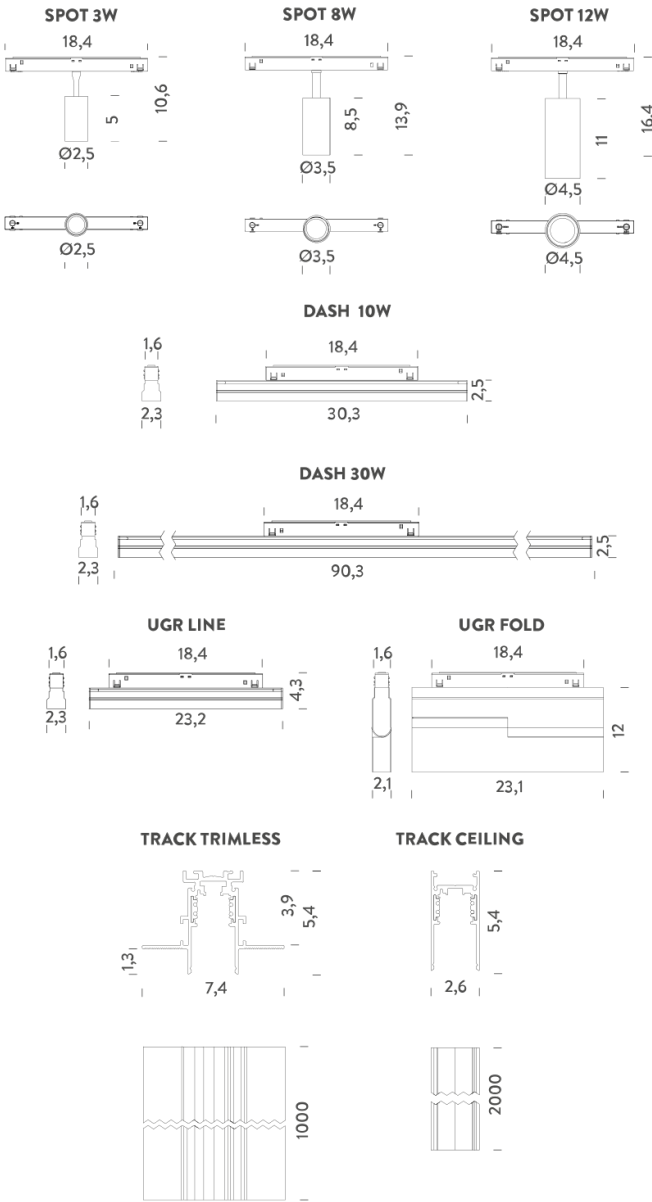

# TRACK CEILING | 3M

## LAMPING


|                       |                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------|
| Tension               | 48V                                                                                  |
| Dimensions            | 300x2,6x5x4                                                                          |
| Materials             | Aluminium                                                                            |
| Notes                 | pendant version available                                                            |
| Customization options | recessed trim version                                                                |
| Accessories           | Ceiling-Pendant Track 48V - accessories,   Ceiling-Trimless Track 48V - accessories, |

## Codes

MFLE0230NE

## Structure

black

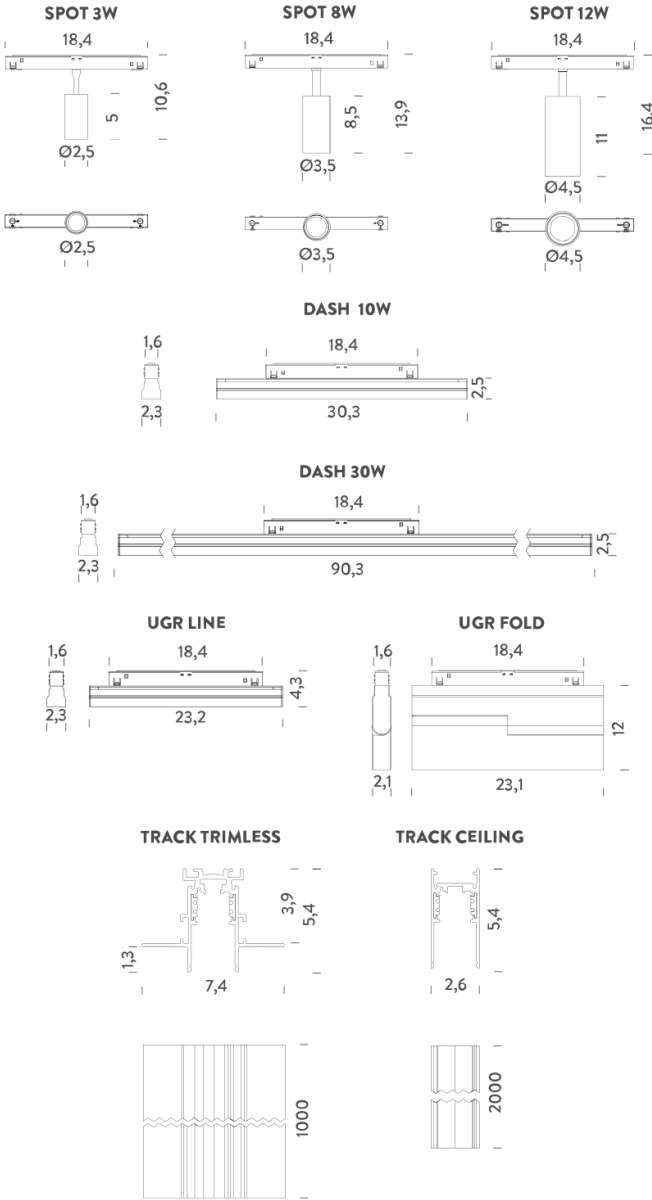

# TRACK TRIMLESS | 1M

## LAMPING


|                       |                                                                               |
|-----------------------|-------------------------------------------------------------------------------|
| Tension               | 48V                                                                           |
| Dimensions            | 100x7,4x5,4                                                                   |
| Materials             | Aluminium                                                                     |
| Customization options | recessed trim version                                                         |
| Accessories           | Ceiling-Trimless Track 48V - accessories,   Trimless Track 48V - accessories, |

## Codes

MFLE0810NE

## Structure

black

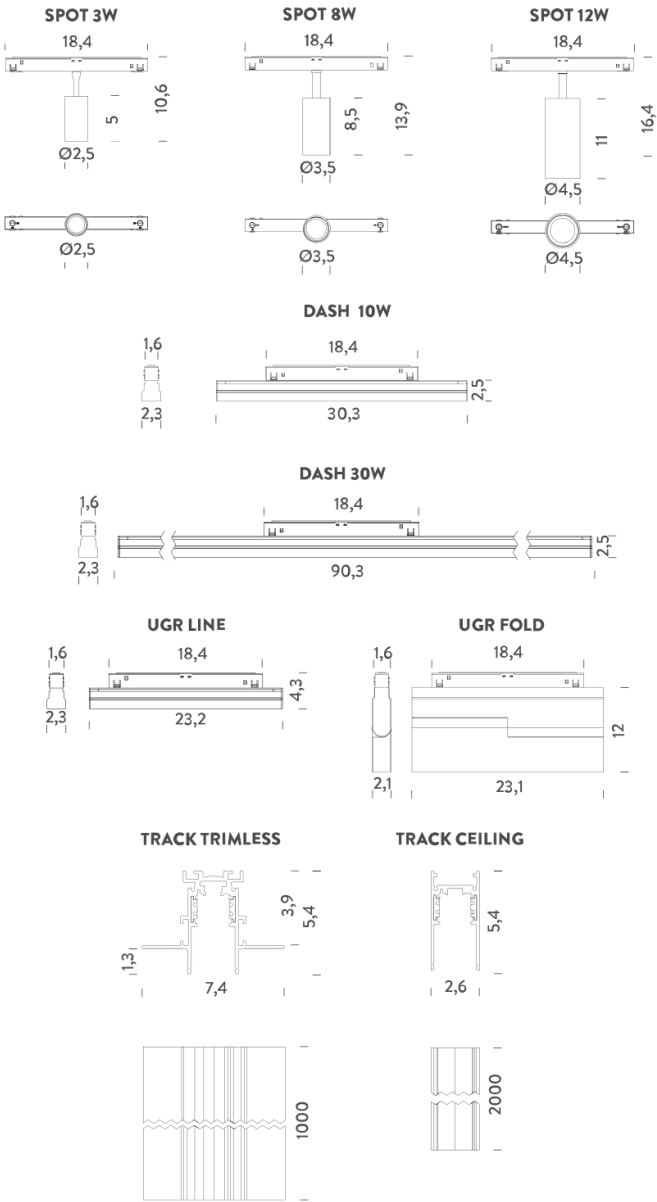

# TRACK TRIMLESS | 2M

## LAMPING


|                       |                                                                               |
|-----------------------|-------------------------------------------------------------------------------|
| Tension               | 48V                                                                           |
| Dimensions            | 200x7,4x5,4                                                                   |
| Materials             | Aluminium                                                                     |
| Customization options | recessed trim version                                                         |
| Accessories           | Ceiling-Trimless Track 48V - accessories,   Trimless Track 48V - accessories, |

## Codes

MFLE0820NE

## Structure

black

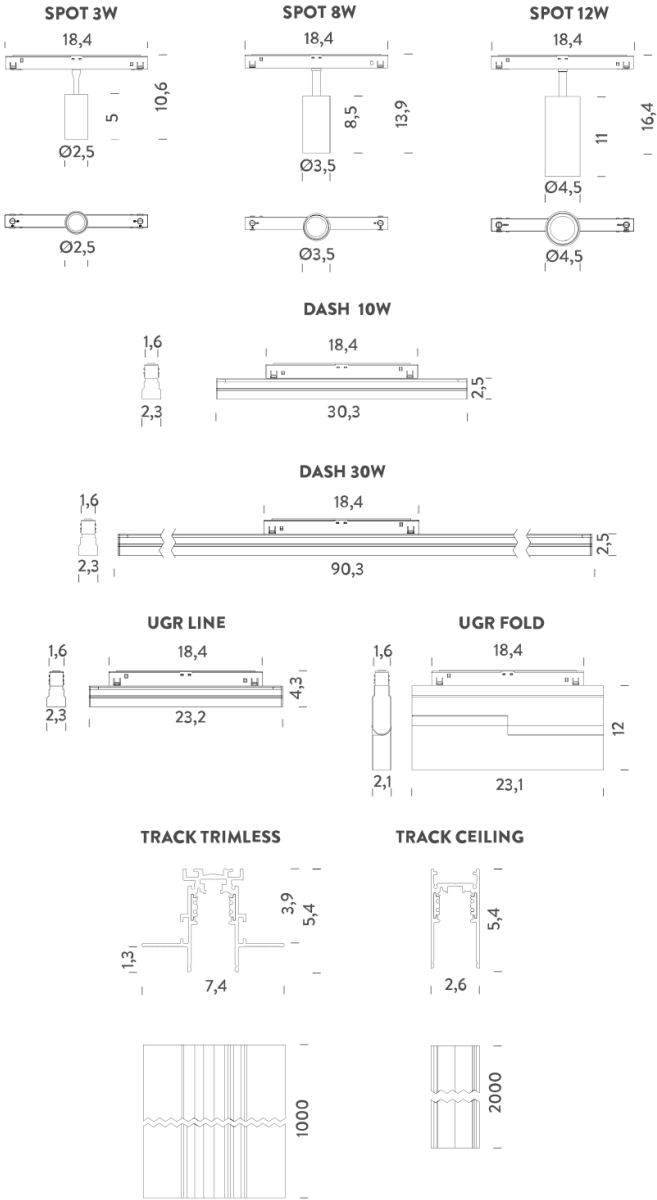

# TRACK TRIMLESS | 3M

## LAMPING

|                       |                                                                               |
|-----------------------|-------------------------------------------------------------------------------|
| Tension               | 48V                                                                           |
| Dimensions            | 300x7,4x5,4                                                                   |
| Materials             | Aluminium                                                                     |
| Customization options | recessed trim version                                                         |
| Accessories           | Ceiling-Trimless Track 48V - accessories,   Trimless Track 48V - accessories, |

## Codes

MFLE0830NE

## Structure

black

