

COCKTAIL

Cocktail Diffuser


Cocktail è un profilo d'illuminazione installabile singolarmente o in fila continua a plafone e sospensione dal design moderno e curato. Le molteplici lunghezze abbinante agli svariati fasci e diffusori lo rendono un sistema versatile e protagonista in diverse soluzioni d'arredo: la versione con ottiche a micro celle viene scelta laddove serve fascio controllato, mentre dove è necessaria un'illuminazione più estesa si predilige la versione con diffusore.

Cocktail is a family of LED linear lighting systems for single or continuous lines, for ceiling or suspended installation with a modern and refined design. The different lengths combined with the various beams and diffusers make it the ideal choice in different solutions: the micro-cell optic for the beam control, the diffuser version for general lighting.



Cocktail
UGR




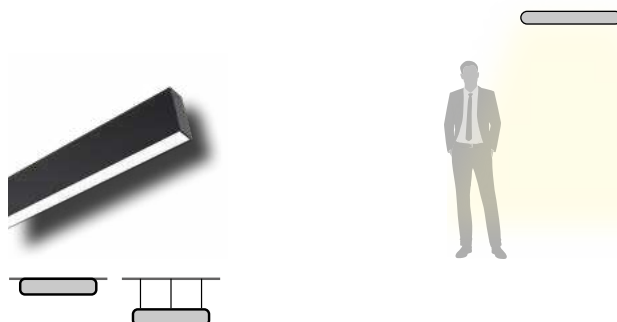

COCKTAIL DIFFUSER

Corpo in estruso di alluminio, testate in acciaio, verniciatura a polveri. Diffusore in policarbonato. Tono luce bianco 4000K o 3000K, Potenze da 28W/1130mm a 56W/2250mm. Alimentatore elettronico e diffusore inclusi. Testate, giunti lineari ed accessori per la sospensione da ordinare a parte.

Structure in powder coated aluminium alloy, steel end caps. Opal polycarbonate diffuser. LED in 4000K or 3000K white tone. Powers from 28W/1130mm up to 56W/2250mm. Electronic driver and diffuser included. End caps, junctions, and kit for recessed installation to be ordered separately.

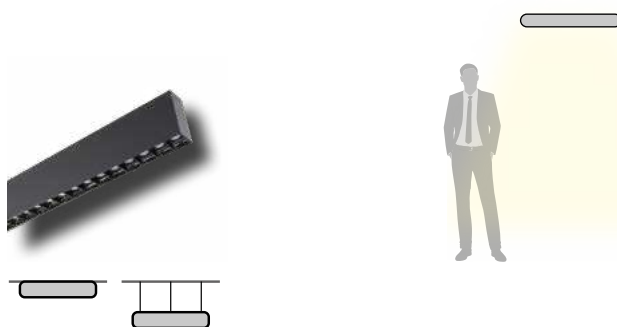

COCKTAIL UGR

Corpo in lega di alluminio, testate in acciaio, verniciatura a polveri. Controllo dell'abbagliamento UGR16 grazie ad un innovativo sistema di ottiche a micro-celle. Tono luce bianco 4000K o 3000K, Potenze da 36W/1190mm a 85W/2245mm. Alimentatore elettronico incluso. Testate, Giunti lineari ed accessori per la sospensione da ordinare a parte.

Structure in powder coated aluminium alloy, steel end caps. Glare control UGR16 thanks to the innovative micro-cells system. LED in 4000K or 3000K white tone. Powers from 36W/1190mm up to 85W/2245mm. Electronic driver included. End caps, junctions, and kit for recessed installation to be ordered separately.

CE	IP20
LED	RG1
CRI 80/90	Driver incl.
L80 B10	Mac Adam 3
	50000H



COCKTAIL

DIFFUSER

Z.
COLOR

bianco/white -02 
nero/black -03 
custom -99 

OPAL
0

X.
CRI80
5

CRI90
6



Y.
5000K
6

4000K
7

3000K
8

DIM.
1-10V
A1

DALI
A2

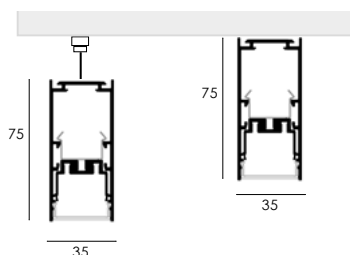

CODICE / CODE	L.MM	W	LM
CTL.3553.0 X Y. Z	1130	28W/230V LED	3920/3820/3620
CTL.3554.0 X Y. Z	1410	35W/230V LED	4910/4780/4540
CTL.3555.0 X Y. Z	1690	42W/230V LED	5880/5730/5430
CTL.3557.0 X Y. Z	2250	56W/230V LED	7840/7640/7240

ACCESSORI / ACCESSORIES



CTL.TE
Testata di chiusura.
End cap.



CTL.CD
Giunto lineare.
Linear joint.



AAA.RA2
Rosone alimentato basic.
Power supply basic.



AAA.SO
Sospensioni (coppia).
Suspension kit (pair).



CTL.DP
Attacco plafone (coppia).
Ceiling bracket (pair).





CE	IP20
LED	RG1
CRI 80/90	Driver incl.
L80 B10	Mac Adam 3
⏏	50000H

- 02- bianco/white
- 03- nero/black
- 99- custom

Z.
COLOR

COCKTAIL

UGR



CODICE / CODE

L.MM

W

LM

CTL.3573.1 X Y. Z	1190	36W/230V LED	4564/4144
CTL.3574.1 X Y. Z	1455	45W/230V LED	5407/5179
CTL.3575.1 X Y. Z	1715	55W/230V LED	6489/6215
CTL.3577.1 X Y. Z	2245	85W/230V LED	8652/8287

LENSES
15° **1**

X.
CRI80 **5**

CRI90 **6**

Y.
5000K **6**

4000K **7**

3000K **8**

DIM.
1-10V **A1**

DALI **A2**

ACCESSORI / ACCESSORIES



CTL.TE
Testata di chiusura.
End cap.



CTL.CD
Giunto lineare.
Linear joint.



AAA.SO
Sospensioni (coppia).
Suspension kit (pair).



AAA.RA2
Rosone alimentato basic.
Power supply basic.



CTL.DP
Attacco plafone (coppia).
Ceiling bracket (pair).