
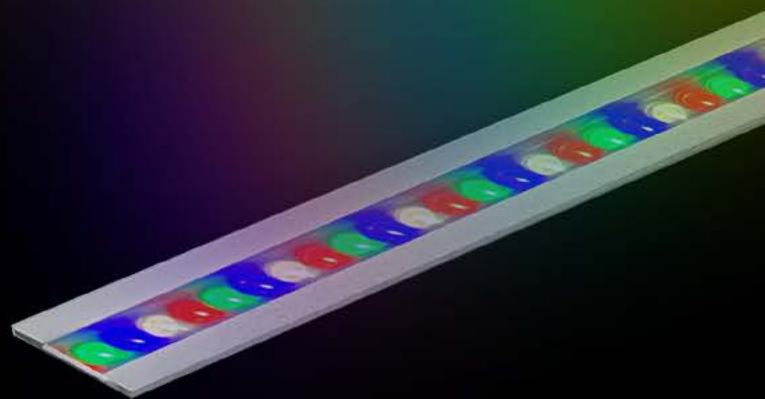


CABRIO


Cabrio
Cabrio RGBW


Famiglia di apparecchi lineari per esterno dal design contemporaneo che ci aiuta inserire la luce dove l'architettura l'ha sottratta: facciate di edifici, volte, portoni e pensiline. Grazie ai molteplici fasci disponibili è facile trovare la soluzione che più si adatta alle proprie esigenze che siano quelle di far risaltare un dettaglio o di realizzare un'illuminazione funzionale e/o decorativa.

A family of linear outdoor luminaires with a contemporary design that helps us insert light where architecture has stolen it: building facades, vaults, doors and canopies. Thanks to the multiple beams available, it is easy to find the solution that best suits your needs, whether they are to bring out a detail or to create functional and / or decorative lighting.

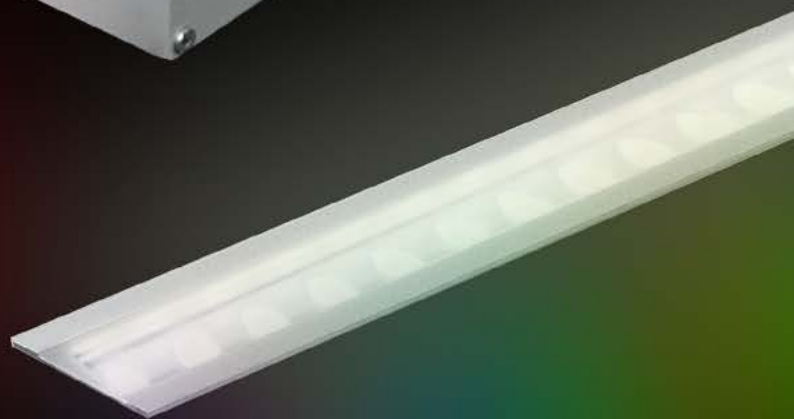

Cabrio Recessed
Cabrio Recessed RGBW

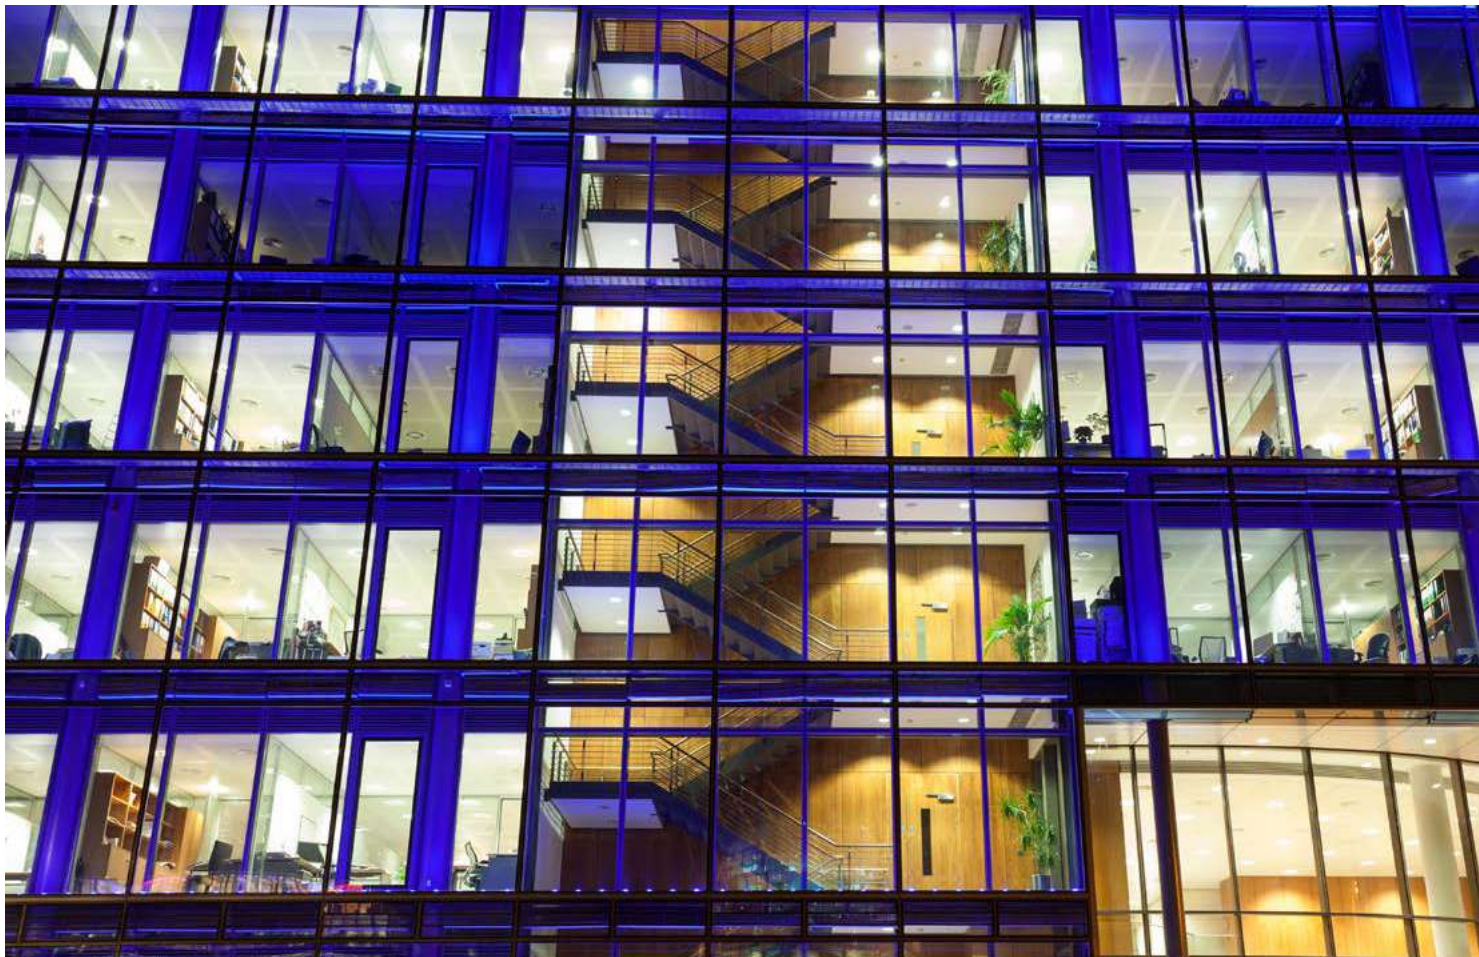




CABRIO

Struttura interamente in alluminio estruso finitura anodizzato ad elevata resistenza all'ossidazione. Diffusore in vetro temperato spessore 6 mm, satinato per luce diffusa o trasparente con lenti. Viti a brugola in acciaio INOX A4. Apparecchio precablato con cavo in neoprene, guarnizioni in silicone ricotto. Tono luce bianco 4000K o 3000K, Potenze da 12.5W /605mm a 28W/1205mm. Alimentatore elettronico incluso.


The structure is made of extruded aluminum, anodized finishing with high resistance against corrosion, tempered glass diffuser 6mm thick, frosted for diffuse light or transparent with lenses. Screws in stainless steel A4, prewired with Neoprene Cable, Silicon Gaskets, 4000K or 3000K LED white tone, from 12.5W /605mm to 28W/1205mm power. Electronic driver included.



CABRIO RGBW

Struttura interamente in alluminio estruso finitura anodizzato ad elevata resistenza all'ossidazione. diffusore in vetro temperato spessore 6 mm, satinato per luce diffusa o trasparente con lenti. Viti a brugola in acciaio INOX A4. Apparecchio precablato con cavo in neoprene, guarnizioni in silicone ricotto. Tono luce bianco 4000K o 3000K. Potenze da 24x1.2W /615mm a 48x1.2W/1215mm. Alimentatore elettronico incluso.

The structure is made of extruded aluminum, anodized finishing with high resistance against corrosion, tempered glass diffuser 6mm thick, frosted for diffuse light or transparent with lenses. Screws in stainless steel A4, prewired with Neoprene Cable, Silicon Gaskets, 4000K or 3000K LED white tone, from 24x1.2W /615mm to 48x1.2W/1215mm power. Electronic driver included.





CE	IP65
LED	RG1
CRI 80	Driver incl.
L80 B10	50000H
	Mac Adam 3



CABRIO

Z.

COLOR

anodizzato/anodised -05	
antracite/anthracite -06	
grigio chiaro opaco/clear matt grey -37	
custom -99	

15°

1

30°

2

10x45°

3

11x30°

4

CR180

5

Y.

4000K

7

3000K

8


DIM.

1-10V

A1

DALI

A2



CODICE / CODE	L.MM	W	LM	FASCIO / BEAM
JEC.5916.0 5 Y. Z	605	12.5W/230V LED	1585/1502	diffuso/diffuse 120°
JEC.5921.1 5 Y. Z	605	14x1.2W/230V LED	1502/1295	stretto/narrow 15°
JEC.5921.2 5 Y. Z	605	14x1.2W/230V LED	1502/1295	largo/wide 30°
JEC.5921.3 5 Y. Z	605	14x1.2W/230V LED	1502/1295	ellittico/elliptical 10x45°
JEC.5921.4 5 Y. Z	605	14x1.2W/230V LED	1502/1295	ellittico/elliptical 11x30°
JEC.5918.0 5 Y. Z	1205	25W/230V LED	3170/3004	diffuso/diffuse 120°
JEC.5923.1 5 Y. Z	1205	28x1.2W/230V LED	3016/2590	stretto/narrow 15°
JEC.5923.2 5 Y. Z	1205	28x1.2W/230V LED	3016/2590	largo/wide 30°
JEC.5923.3 5 Y. Z	1205	28x1.2W/230V LED	3016/2590	ellittico/elliptical 10x45°
JEC.5923.4 5 Y. Z	1205	28x1.2W/230V LED	3016/2590	ellittico/elliptical 11x30°

ACCESSORI / ACCESSORIES



JEC.AP
Attacchi a parete (coppia).
Wall mount (pair).



AAA.CN3
Connettore IP68, 3vie.
IP68 waterproof connector, 3way.



JEC.APR
Ganci di fissaggio regolabili (coppia).
Fixing adjustable hook (pair).



AAA.CN4
Connettore IP68, 4vie.
IP68 waterproof connector, 4way.




CE	IP65
LED	RG1
Mac Adam 3	50000H
L80 B10	RGBW
⏏	

- 05-** anodizzato/anodised
- 06-** antracite/anthracite
- 37-** grigio chiaro opaco/clear matt grey
- 99-** custom

Z.
COLOR

CABRIO

R G B W



- D.**
15°
1
- 30°
2
- 10X45°
3

CODICE / CODE	L.MM	W	DRIVER
JEC.5931.D 99. Z	615	24x1.2W/230V RGBW	driver-dmx incluso/ driver-dmx included
JEC.5932.D 99. Z	915	36x1.2W/230V RGBW	driver-dmx incluso/ driver-dmx included
JEC.5933.D 99. Z	1215	48x1.2W/230V RGBW	driver-dmx incluso/ driver-dmx included

ACCESSORI / ACCESSORIES



AAA.TRSL27N
Centralina di controllo RGBW.
RGBW control unit.



JEC.AP
Attacchi a parete (coppia).
Wall mount (pair).



JEC.APR
Ganci di fissaggio (coppia).
Fixing hook (pair).



AAA.CN3
Connettore IP68, 3vie.
IP68 waterproof connector, 3way.



AAA.CN4
Connettore IP68, 4vie.
IP68 waterproof connector, 4way.