

LUX SURFACE

LUX is a collection of high-performance spots for outdoor.

Lux Surface is suitable for downlight applications and guarantees a direct and homogeneous lighting. It is available in different finishes, color temperatures and beam angles. Driver on-board.



SURFACE | 2700° - 14°

LAMPING

| | |
|---------------------------------|--------------------------|
| Source | LED |
| Total power | 13,5W |
| Emission | 14° |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 1040lm |
| Initial luminaire efficacy | 77lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | >90 |
| IP class | 65 |
| Dimensions | Ø8,9x13,8 |
| Materials | Aluminium |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | Driver on board UGR<19 |
| Net lamp weight | 1,03 kg |

Codes


BLUC0901N43DAA
BLUC0901N43DAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

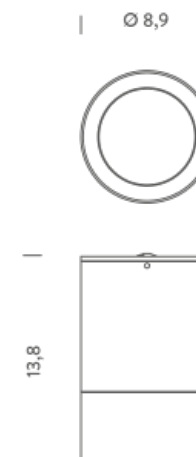

SURFACE | 2700° - 53°

LAMPING

| | |
|---------------------------------|--------------------------|
| Source | LED |
| Total power | 13,5W |
| Emission | 53° |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 900lm |
| Initial luminaire efficacy | 67lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | >90 |
| IP class | 65 |
| Dimensions | Ø8,9x13,8 |
| Materials | Aluminium |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | Driver on board UGR<19 |
| Net lamp weight | 1,03 kg |

Codes


BLUC0901H43DAA
BLUC0901H43DAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

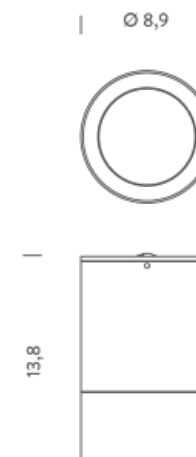

SURFACE | 3000° - 14°

LAMPING

| | |
|---------------------------------|--------------------------|
| Source | LED |
| Total power | 13,5W |
| Emission | 14° |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 1100lm |
| Initial luminaire efficacy | 81lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | >90 |
| IP class | 65 |
| Dimensions | Ø8,9x13,8 |
| Materials | Aluminium |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | Driver on board UGR<19 |
| Net lamp weight | 1,03 kg |

Codes


BLUC0901N43WAA
BLUC0901N43WAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

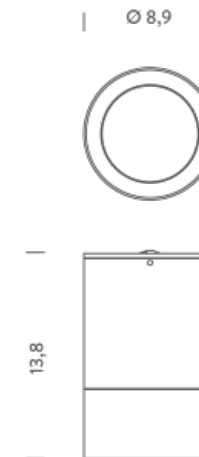

SURFACE | 3000° - 53°

LAMPING

| | |
|---------------------------------|--------------------------|
| Source | LED |
| Total power | 13,5W |
| Emission | 53° |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 950lm |
| Initial luminaire efficacy | 70lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | >90 |
| IP class | 65 |
| Dimensions | Ø8,9x13,8 |
| Materials | Aluminium |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | Driver on board UGR<19 |
| Net lamp weight | 1,03 kg |

Codes


BLUC0901H43WAA
BLUC0901H43WAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

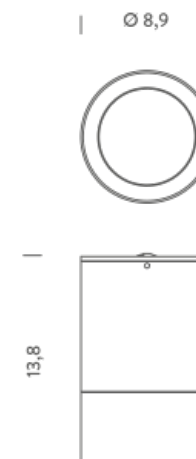

SURFACE | 4000° - 14°

LAMPING

| | |
|---------------------------------|--------------------------|
| Source | LED |
| Total power | 13,5W |
| Emission | 14° |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 1200lm |
| Initial luminaire efficacy | 89lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | >90 |
| IP class | 65 |
| Dimensions | Ø8,9x13,8 |
| Materials | Aluminium |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | Driver on board UGR<19 |
| Net lamp weight | 1,03 kg |

Codes


BLUC0901N43NAA
BLUC0901N43NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

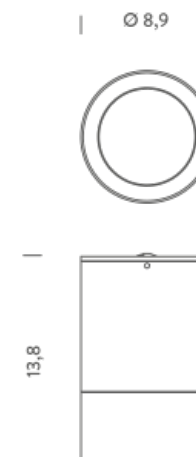

SURFACE | 4000° - 53°

LAMPING

| | |
|---------------------------------|--------------------------|
| Source | LED |
| Total power | 13,5W |
| Emission | 53° |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 1050lm |
| Initial luminaire efficacy | 78lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | >90 |
| IP class | 65 |
| Dimensions | Ø8,9x13,8 |
| Materials | Aluminium |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | Driver on board UGR<19 |
| Net lamp weight | 1,03 kg |

Codes

BLUC0901H43NAA
BLUC0901H43NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

