



# SMARTSCAN GATEWAY



MASTER CONTROL AND  
WEB INTERFACE WITH SMARTSCAN  
WIRELESS COMMUNICATION




## SPECIFICATION

- Polycarbonate body finished white (RAL9016)
- Central monitoring for up to 250 SmartScan and SmartScan emergency luminaires. Extra Gateways can be installed to accommodate larger installations
- Central time control for SmartScan External luminaires
- Communicates with the SmartScan website using MQTT mobile telecommunications
- Enables scheduled emergency test times / dates managed using the SmartScan website.
- Status Indicators show operational condition
- Ethernet connection for alternate connectivity to SmartScan website

## RANGE

DESCRIPTION	CAT. No.	APPROX. kg
SmartScan Gateway	<b>SS 20210</b>	1.0

## DIMENSIONS

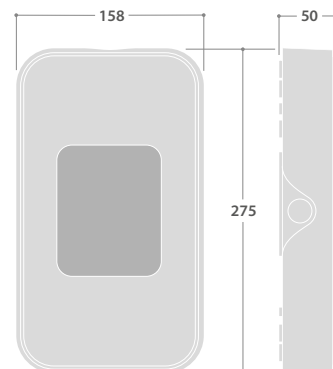

### SmartScan Wireless Standards Compliance:

Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1

Australasia: ACMA 2014 Radio Communication Standard 2014

Thorlux Patented Wireless Technology - GB2575724