



SMARTSCAN GATEWAY LITE



MASTER CONTROL AND WEB INTERFACE WITH SMARTSCAN WIRELESS COMMUNICATION



SPECIFICATION


- Polycarbonate body finished white (RAL9016)
- Central monitoring for up to a maximum of 50 SmartScan luminaires - ideal for smaller projects *
- Central time control for SmartScan External luminaires
- Communicates with the SmartScan website using MQTT mobile telecommunications
- Enables scheduled emergency test times / dates managed using the SmartScan website.
- Status Indicators show operational condition
- Ethernet connection for alternate connectivity to SmartScan website

*The Gateway Lite is limited to a single poll every 24 hours and no live occupancy detection option

RANGE

DESCRIPTION	CAT. No.	APPROX. kg
SmartScan Gateway Lite	SS 20458	1.0

DIMENSIONS

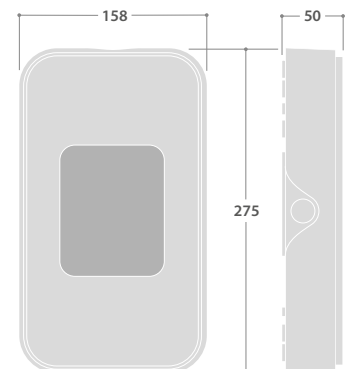

SmartScan Wireless Standards Compliance:
 Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1
 Australasia: ACMA 2014 Radio Communication Standard 2014
 Thorlux Patented Wireless Technology - GB2575724