


Design by
Ángel Díaz Cambrero

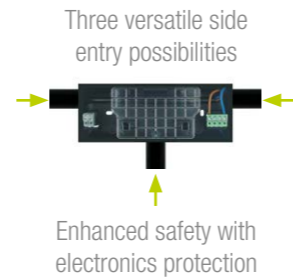

- Ease of pictogram placement.
- It allows lateral cable entry.

EXITALYA MAXI Surface Downlight

(Surface Wall Mounted)


SPECIFICATION

- Polycarbonate body
- Sign + Optics
- IP42
- IK04
- 120 lm
- Duration: 1 - 3 h - Battery: LiFePO₄
- Charging time: 12 h
- Supply: 230 V - 50 Hz
- LED temperature: 6000 °K
- Working temperature: 0 °C to +40 °C
- AutoTest
- SmartZ[®]
- Lateral cable entry

VIEW EVO10 RANGE



DIMENSIONS (mm)

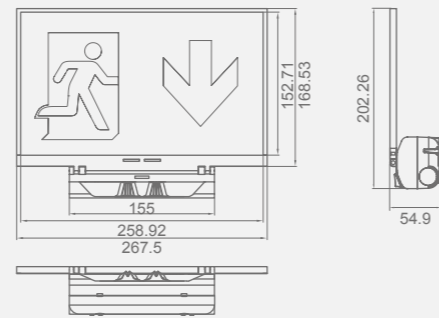

VIEWING DISTANCE



STANDARDS COMPLIANCE

EN-60598-2-22
Pictographs: EN ISO7010
AutoTest: EN-62034
DALI-2: EN 62386
Wireless SmartZ[®]: ETSI EN 303 447-1

CERTIFICATIONS



New transparent frame

	RANGE				Battery	Part number
	Emergency	Mains	Type*	Dur.		
AutoTest	120 lm	70 lm	M	1 h	3.2V 1.5A/h LiFePO ₄	LYE5120LXP
	120 lm	70 lm	M	3 h	3.2V 3.0A/h LiFePO ₄	LYE5120LXP3
	120 lm	70 lm	M	1 h	3.2V 1.5A/h LiFePO ₄	LYE5120LAP
	120 lm	70 lm	M	3 h	3.2V 3.0A/h LiFePO ₄	LYE5120LAP3
Wireless SmartZ [®]	120 lm	70 lm	M	1 h	3.2V 1.5A/h LiFePO ₄	LYE5120LWP
	120 lm	70 lm	M	3 h	3.2V 3.0A/h LiFePO ₄	LYE5120LWP3

*M: Maintained.
Luminous flux decreases by 18% in black colour version.
For black version, add "N" at the end of the part number.


SPACING TABLE

Spacing table calculated with 1 lux minimum illuminance




Height (H)	Spacing Data (d)
	120 lm
2.5 m	8.5 m
3 m	7.8 m
3.5 m	6.7 m
4 m	6.3 m
4.5 m	6.3 m


ISOLUX CURVE

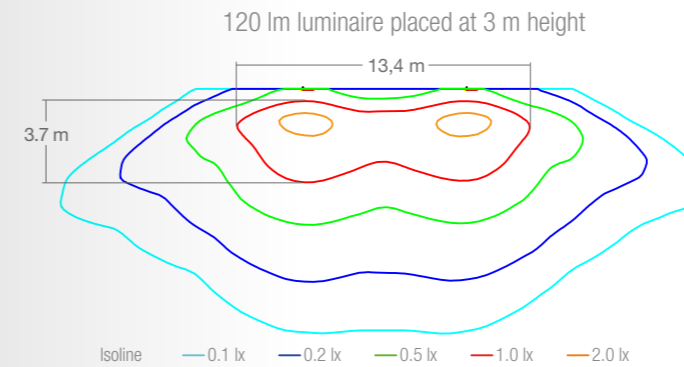

PHOTOMETRIC GUIDE

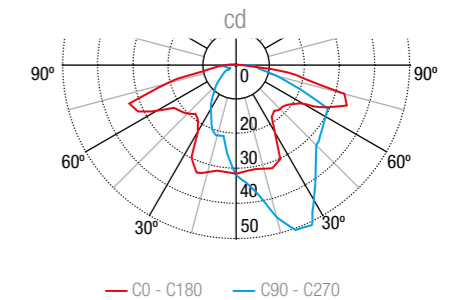

It is supplied with a complete set of pictograms



Ease of pictogram placement