


Design by
Ángel Díaz Cambronero

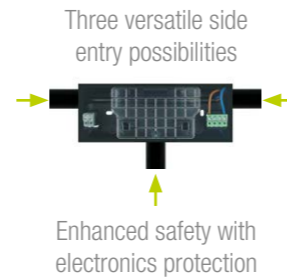

- Ease of pictogram placement.
- It allows lateral cable entry.

EXITALYA MAXI Surface

(Surface Ceiling Mounted & Surface Wall Mounted)

SPECIFICATION

- Polycarbonate body
- IP42
- IK04
- Duration: 1 - 3 - 8 h · Battery: LiFePO₄
- Charging time: 12 h
- Supply: 230 V - 50 Hz
- LED temperature: 6000 °K
- Working temperature: 0 °C to +40 °C
- AutoTest
- SmartZ[®]
- Lateral cable entry

VIEW EVO10 RANGE


WARRANTY
5 YEAR

EVO10 WARRANTY
10 YEAR


STANDARDS COMPLIANCE

EN-60598-2-22
Pictographs: EN ISO7010
AutoTest: EN-62034
DALI-2: EN 62386
Wireless SmartZ[®]: ETSI EN 303 447-1

DIMENSIONS (mm)

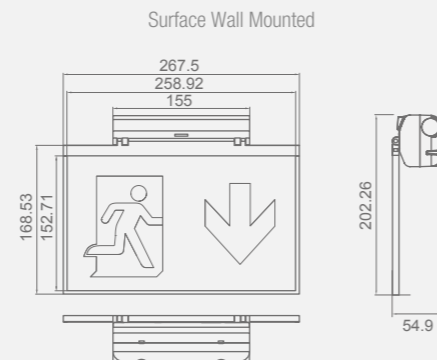

VIEWING DISTANCE



CERTIFICATIONS



New transparent frame

RANGE				
	Type*	Dur.	Battery	Part number
AutoTest	M	1 h	3.2V 1.0A/h LiFePO ₄	LYE5070LXP
	M	3 h	3.2V 1.5A/h LiFePO ₄	LYE5070LXP3
	M	1 h	3.2V 1.0A/h LiFePO ₄	LYE5070LAP
	M	3 h	3.2V 1.5A/h LiFePO ₄	LYE5070LAP3
Wireless SmartZ [®]	M	1 h	3.2V 1.0A/h LiFePO ₄	LYE5070LWP
	M	3 h	3.2V 1.5A/h LiFePO ₄	LYE5070LWP3
	M	8 h	3.2V 3.0A/h LiFePO ₄	LYE5070LWP8

*M: Maintained.

For version in black colour, add an 'N' at the end of the part number.



180° adaptable

Its specific design makes it an exign sign adaptable to any position on the surface where it is installed: ceiling, wall or sloping ceiling.

The banner is made of a very innovative self-diffusing material that provides a perfect and uniform diffusion of light.



Ease of pictogram placement

It is supplied with a complete set of pictographs

