

Track mounted adjustable spotlights

Strike M is a stylish track mounted spotlight with discrete in-track control gear and is perfectly suited for display and retail applications. The adaptable design allows interchangeable low glare optics which are available in either narrow (22°), wide (33°) or flood (54°) beams providing a smooth distribution and reducing spill light.

Strike M boasts the same great features as the Strike S including CRI90 LEDs, 3000 K and 4000 K options as standard, and the ability to be rotated 350° azimuth and 90° vertically for a full range of movement. For use with the Track system.

Applications: Display & feature, retail, reception areas, hospitality, art galleries, museums, libraries

- Die-cast aluminium body
- 350° azimuth adjustment
- 90° vertical adjustment
- Low glare optical control
- Optimised beam distribution using lens for reduced spill light
- Fitted with CRI 90 LEDs, suitable for retail applications
- Suitable for installation into Global track



IP20

Up to 123.1 LL/CW

Specification

| | | | |
|----------|-------|-----------|------|
| Mounting | Track | IP rating | IP20 |
|----------|-------|-----------|------|

Lighting

| | | | |
|--------------|--|--------------|---------------------|
| Distribution | 22° beam - Narrow 33° beam - Wide 54° beam - Flood | Lumen output | 1,900 lm - 3,200 lm |
| Efficacy | Up to 123.1 LL/CW | | |

Power

| | | | |
|-----------|-------------|---------------|-------------|
| LED power | 15 W - 22 W | Circuit power | 18 W - 26 W |
|-----------|-------------|---------------|-------------|

Construction

| | | | |
|-------------|--------------------------------------|------------------|---|
| Housing | Die-cast aluminium body | Finish | Full polyester powder coat |
| Body colour | Black (RAL 9005) White (RAL 9016) | Optical assembly | Optimised COB optic for smooth distribution |


LED characteristics

| | | | |
|--------------------------|----------------|--------------------|------------------|
| CRI | 90+ | Colour temperature | 3000 K 4000 K |
| Rated life (hours) | 67 K - L80/B10 | Driver efficiency | >85% |
| Replaceable light source | Yes | Power factor | >0.95 |
| MacAdam ellipse | 3 Step | | |

Compliance

| | | | |
|------|-----|----|-----|
| UKCA | Yes | CE | Yes |
|------|-----|----|-----|


Dimensions

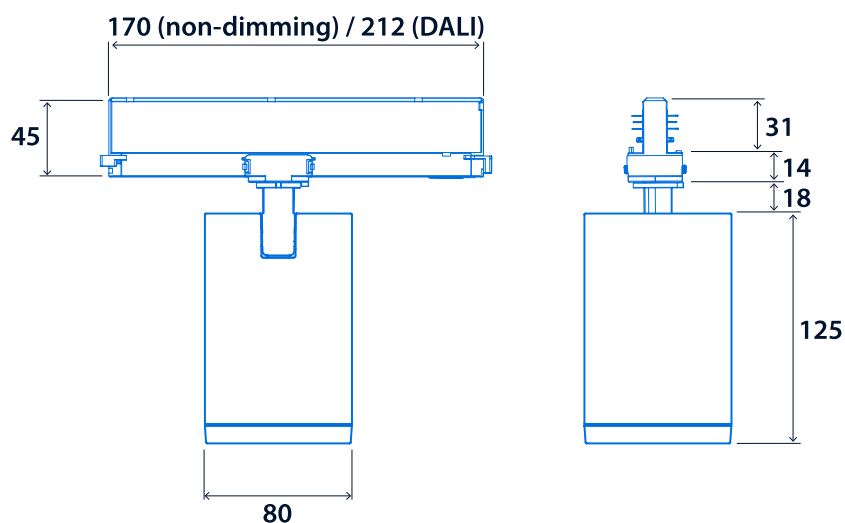

Strike M



Track mounted non-dimming in white

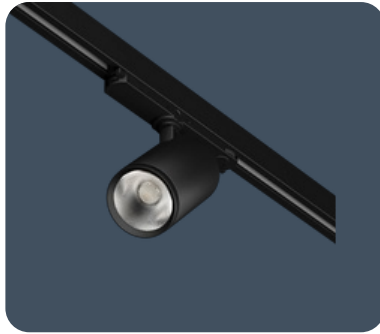

Track mounted DALI dimming in black



Narrow optic - 22° beam




Wide optic - 33° beam



Flood optic - 54° beam

Click or scan here
View Strike M variants using
our online filtering tool



Information is correct as of 10 Feb 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.