

## Surface mounted LED luminaires

Surface mounted circular luminaires with opal polycarbonate cover.

Applications: stairways, circulation areas and information points.

- ColourActive with 3000K – 6500K.
- Manual or automatic colour shift with SmartScan Gateway.
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP40

Up to 136.0 LL/CW

 SMARTSCAN

 LUXGUARD

### Specification

Mounting	Surface	IP rating	IP40
Nominal size	490 mm dia.	Max presence detection height	Up to 8 m

### Lighting

Optic	Opal cover	Lumen output	3000 lm
Efficacy	Up to 136.0 LL/CW		

### Emergency data

Emergency lumen output	170 lm - 380 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

### Power

LED power	26 W	Circuit power	29 W
-----------	------	---------------	------

Construction

Housing	Spun aluminium body	Finish	Full polyester powder coat
Body colour	White	Optical assembly	Textured polycarbonate cover


LED characteristics

CRI	80+	Colour temperature	3000K - 6500 K
Rated life (hours)	100 K - L80/B10	LED protection	LUX Guard
Driver efficiency	>88%	Replaceable light source	Yes
Power factor	>0.95	MacAdam ellipse	3 Step

Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class B		

Dimensions

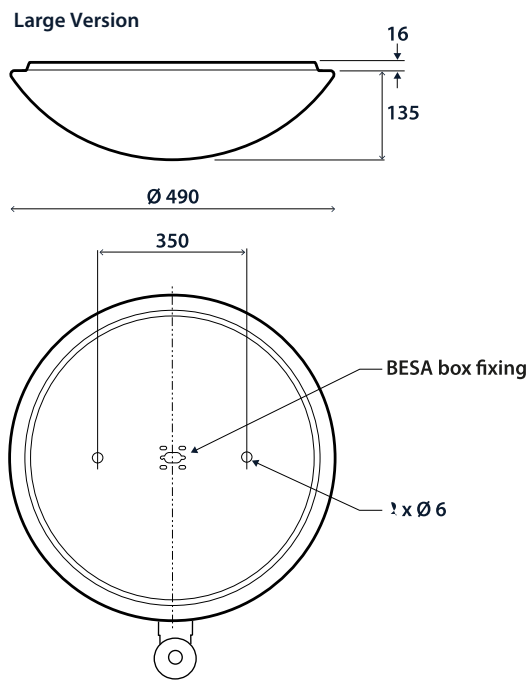

# Glodome ColourActive

