

Surface mounted colour temperature  
changing shallow profile controller luminaires

Tunable white shallow profile surface mounted luminaires with co-extruded 'Satin-Glo' polycarbonate controller.

Applications: schools, hospitals.

- Fitted with 3000 K and 6500 K LEDs for colour temperature control
- Shallow profile design
- ColourActive versions feature SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP40

Up to 102.4 LL/CW

 SMARTSCAN

 LUXGUARD

Specification

Mounting	Surface	IP rating	IP40
Nominal size	1500 mm		

Lighting

Optic	Satin-Glo diffuser	Lumen output	3,480 lm - 4,175 lm
Efficacy	Up to 102.4 LL/CW		

Emergency data

Emergency lumen output	520 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	30 W - 37 W	Circuit power	34 W - 42 W
-----------	-------------	---------------	-------------

Construction

Housing	Zinc coated steel body	Finish	Full polyester powder coat
Body colour	White	Optical assembly	Co-extruded polycarbonate diffuser


LED characteristics

CRI	80+	Colour temperature	3000 - 6500 K
Rated life (hours)	63 K - L80/B10	LED protection	LUX Guard
Driver efficiency	>85%	Replaceable light source	Yes
Power factor	>0.95	MacAdam ellipse	3 Step

Compliance

UKCA	Yes	CE	Yes
------	-----	----	-----

Dimensions

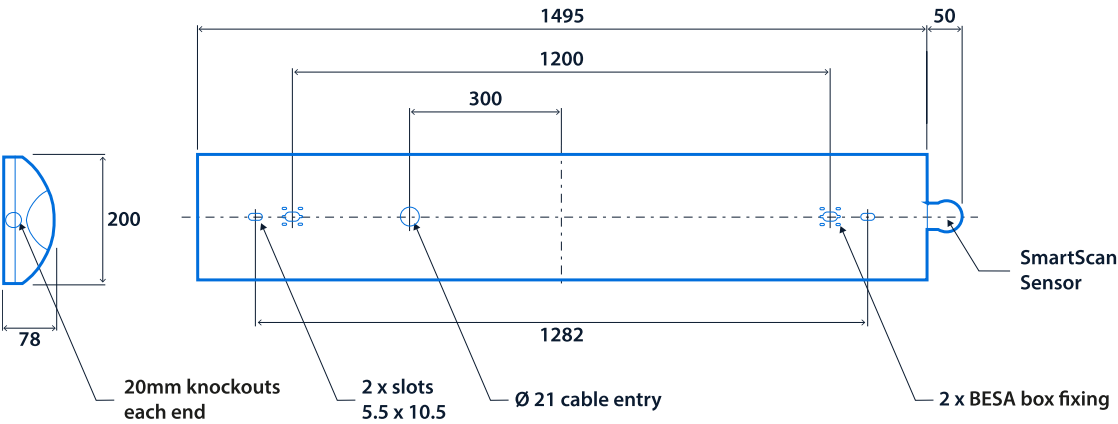



**Click or scan here**

View Jubilee CA variants  
using our online filtering tool



Information is correct as of 26-Mar-2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.