

Recessed linear wall wash luminaires

Recessed mounted wall wash luminaires. Asymmetric light distribution ideal for illuminating vertical surfaces.

Applications: reception areas, retail, display.

- Asymmetric distribution providing uniform illumination of vertical surfaces
- Acrylic ribbed satin diffuser
- Hinged reflector for easy access to wiring terminations



IP20

Up to 92.7 LL/CW

Specification

Mounting	Recessed	IP rating	IP20
Nominal size	600 mm 1200 mm		

Lighting

Distribution	Asymmetric	Lumen output	1,895 lm - 4,080 lm
Efficacy	Up to 92.7 LL/CW		

Power

LED power	19 W - 38 W	Circuit power	23 W - 44 W
-----------	-------------	---------------	-------------

Construction

Housing	Zinc coated steel body and reflector	Finish	Full polyester powder coat
Body colour	Satin white		

LED characteristics


CRI	80+	Colour temperature	3000 K 4000 K
Rated life (hours)	60 K - L70/B10	LED protection	-
Driver efficiency	>85%	Power factor	>0.9
MacAdam ellipse	3 Step		

Compliance


UKCA	Yes	CE	Yes
------	-----	----	-----

Dimensions

600 x 300

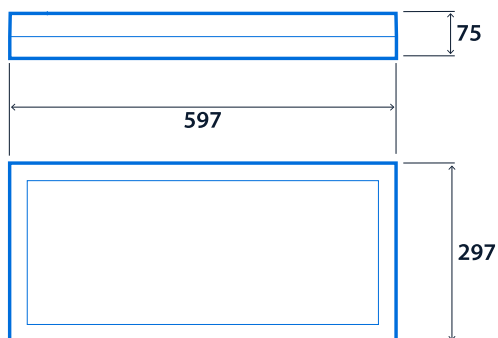

1200 x 300

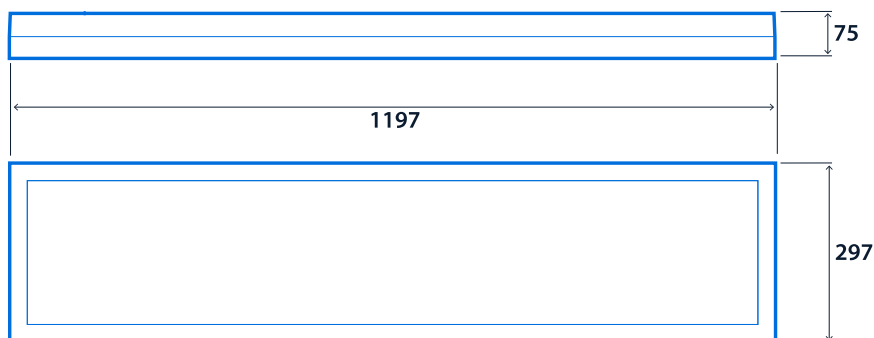



Click or scan here
View Quadline variants using
our online filtering tool



Information is correct as of 14 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.