

Adjustable recessed spotlights

Recessed mounted display luminaires. 355° azimuth adjustment and a 60° vertical adjustment. 10 W or 15 W - 38° beam versions, available in 3000K and 4000K.

Applications: Display, retail, reception areas, halls of residence, hotels, restaurants, public buildings.

- 38° beam angle
- 355° azimuth adjustment
- 60° vertical adjustment
- Supplied with remote gear unit
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the SmartScan Hub
- Fitted with CRI 90 LEDs. Suitable for retail applications

Notes: Black and silver finishes and CRI 80 version available to special order (minimum order quantity applies)



IP20

Up to 122.1 LL/CW

Specification

Mounting	Recessed	IP rating	IP20
----------	----------	-----------	------

Lighting

Distribution	38° beam	Lumen output	1,440 lm - 2,135 lm
Efficacy	Up to 122.1 LL/CW		

Power

LED power	10 W - 15 W	Circuit power	12 W - 18 W
-----------	-------------	---------------	-------------

Construction

Housing	Die-cast aluminium ring assembly	Body colour	Satin white Satin white (RAL9016)
Optical assembly	High performance aluminium reflector with injection moulded anti-glare bezel		


LED characteristics

CRI	90+	Colour temperature	3000 K 4000 K
Rated life (hours)	67 K - L80/B10	LED protection	-
Driver efficiency	>83%	Power factor	>0.93
MacAdam ellipse	3 Step		

Compliance


UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class E		

Dimensions

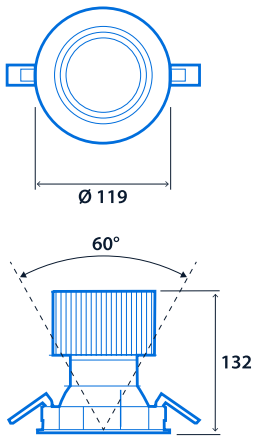


Cut-out - Ø 110
Minimum ceiling void - 180

DALI Remote Driver

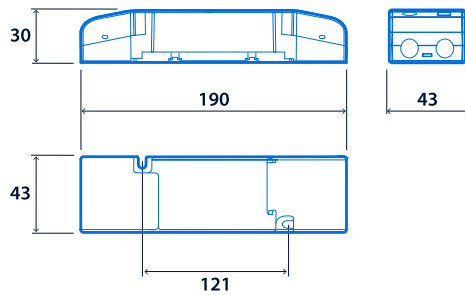

Non-Dimming Remote Driver

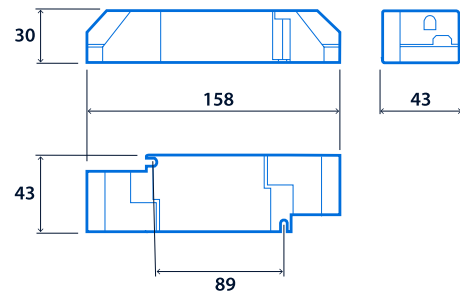



Click or scan here
View Mina-M variants using
our online filtering tool



Information is correct as of 11-Apr-2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.