



OUTLIGHT


IP65 IK10

SPECIFICATION

- Die-casting aluminum
- Diffuser: Polycarbonate
- IP65
- IK10
- 300 lm
- Duration: 1 h · Battery: LiFePO₄
- Charging time: 24 h
- Supply: 220 - 240 V - 50 / 60 Hz
- LED temperature: 3000 °K / 4000 °K
- Working temperature: 0 °C to +40 °C
- AutoTest



DIMENSIONS (mm)

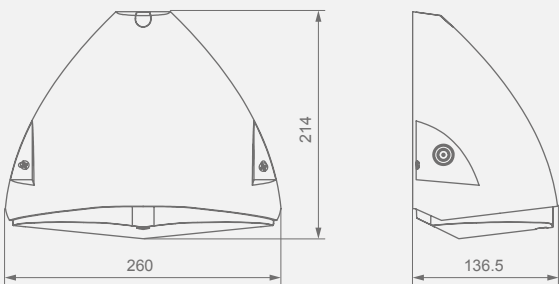

STANDARDS COMPLIANCE

EN-60598-2-22
EN-60598-1

CERTIFICATIONS



RANGE

	Emergency	Type*	Dur.	Battery	Part number
AutoTest	300 lm	M/NM	1 h	3.2V 1.5Ah LiFePO ₄	LOE3300LXP

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.
For version in white colour, add an 'B' at the end of the part number.

SPACING TABLE


Spacing table calculated with 1 lux minimum illuminance



Height (H)	Spacing Data (d)
	300 lm
2.5 m	10.36 m
3 m	11.15 m
4 m	12.39 m
5 m	13.25 m
6 m	13.76 m

ISOLUX CURVE

300 lm luminaire placed at 3m height

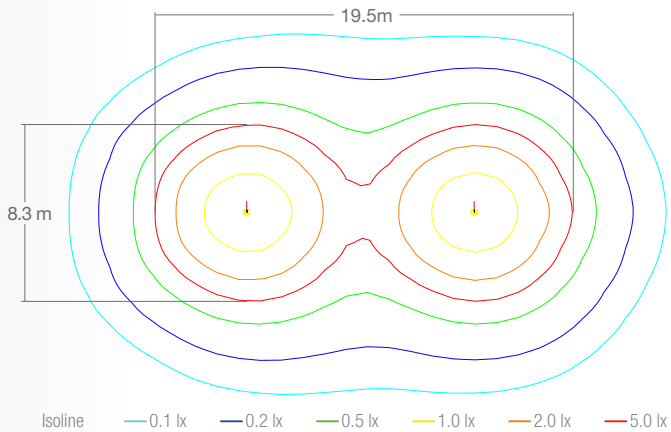

PHOTOMETRIC GUIDE

