



Real size



SPAZIO PLUS




SPECIFICATION

- Polycarbonate body
- Escape route lens
Anti-panic lens
Asymmetrical wall lens
- IP42
- IK04
- 50 lm - 250 lm
- Duration: 1 - 3 - 8 h · Battery: LiFePO₄
- Charging time: 12 h
- Supply: 230 V - 50 Hz
- LED temperature: 4000 °K
- Working temperature: 0 °C to +40 °C
- AutoTest
- SmartZ[®]



DIMENSIONS (mm)

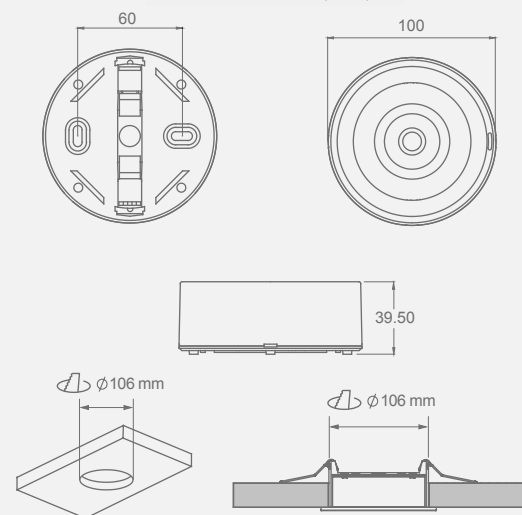

STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034
DALI-2: EN 62386
Wireless SmartZ[®]: ETSI EN 303 447-1

CERTIFICATIONS



RANGE


	Emergency	Mains	Type*	Dur.	Battery	Part number
AutoTest	250 lm	150 lm	M/NM	1 h	3.2V 1.5A/h LiFePO ₄	LSP3255LXP
	165 lm	100 lm	M/NM	3 h	3.2V 1.8A/h LiFePO ₄	LSP3175LXP3
DALI-2	250 lm	150 lm	M/NM	1 h	3.2V 1.5A/h LiFePO ₄	LSP3255LAP
	165 lm	100 lm	M/NM	3 h	3.2V 1.8A/h LiFePO ₄	LSP3175LAP3
Wireless SmartZ [®]	250 lm	150 lm	M/NM	1 h	3.2V 1.5A/h LiFePO ₄	LSP3255LWP
	165 lm	100 lm	M/NM	3 h	3.2V 1.8A/h LiFePO ₄	LSP3175LWP3
	50 lm		NM	8 h	3.2V 1.8A/h LiFePO ₄	LSP3050LW8

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.
All part numbers are supplied with antipanic and evacuation lens. For Asymmetrical wall lens, please request accessory ALP0012.

For version in black colour, add an 'N' at the end of the part number.

SPACING TABLE

ESCAPE ROUTE LENS

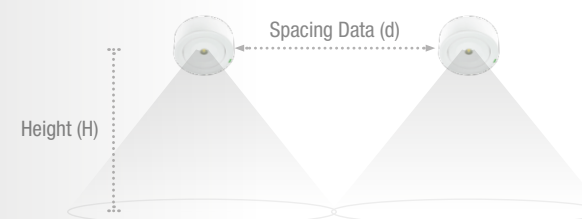


Spacing table calculated with 1 lux minimum illuminance


Height (H)	Spacing Data (d)	
	165 lm	250 lm
2.5 m	21.4 m	22.2 m
3 m	23.8 m	25.9 m
4 m	22.3 m	30.7 m
5 m	18.9 m	27.5 m
6 m	7.5 m	24.0 m

ISOLUX CURVE

250 lm luminaire placed at 3 m height

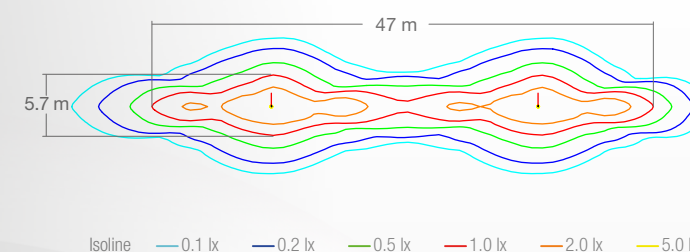

PHOTOMETRIC GUIDE

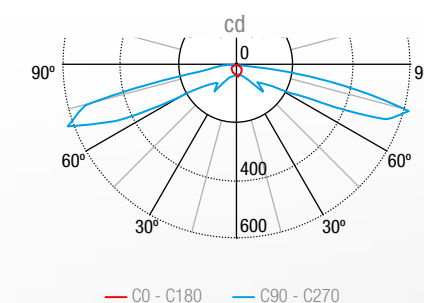


SPAZIO PLUS


ZEMPER

ANTI-PANIC LENS

Spacing table calculated with 0.5 lux minimum illuminance

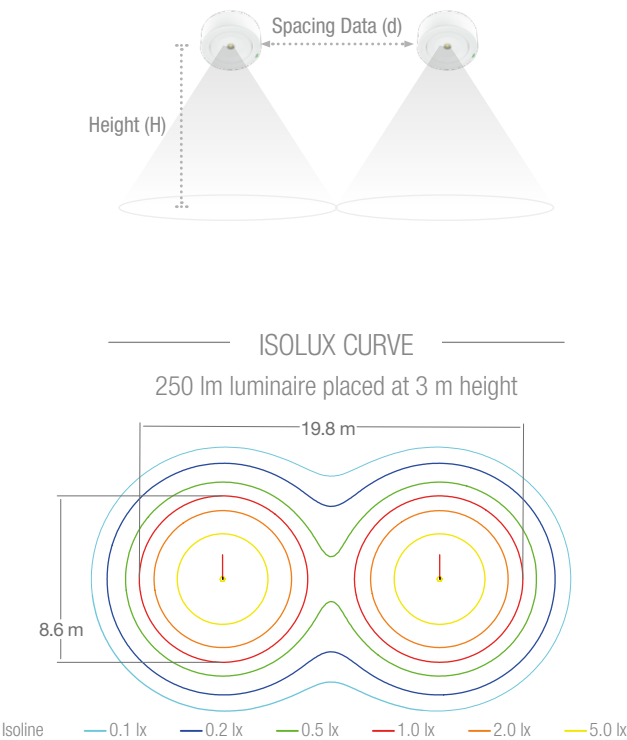


Height (H)	Spacing Data (d)	
	165 lm	250 lm
2.5 m	9.7 m	10.4 m
3 m	10.8 m	11.7 m
4 m	12.9 m	14.0 m
5 m	14.6 m	16.0 m
6 m	15.9 m	17.7 m

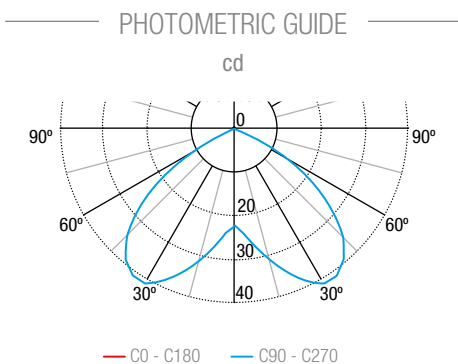


ASYMMETRICAL WALL LENS

Spacing table calculated with 1 lux minimum illuminance

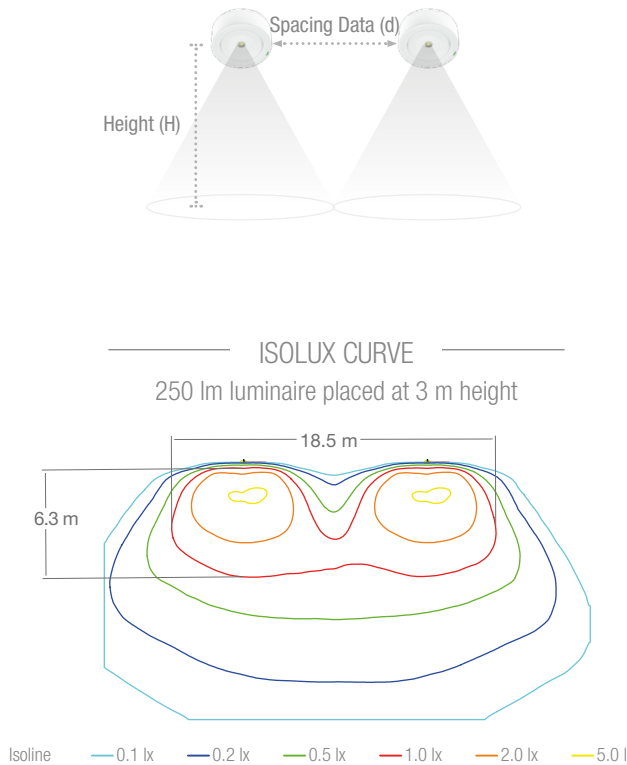

Height (H)	Spacing Data (d)	
	165 lm	250 lm
2.5 m	9.0 m	10.1 m
3 m	9.7 m	11.0 m
3.5 m	10.2 m	11.7 m
4 m	10.6 m	12.3 m
4.5 m	10.9 m	12.8 m

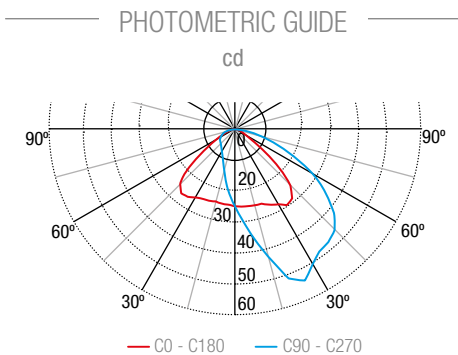

ACCESSORIES

INTERCHANGEABLE LENS

