




Three versatile side
entry possibilities



Enhanced safety with
electronics protection

WALYA MAXI



It allows lateral cable entry.

Design by
Ángel Díaz Cambrero

SPECIFICATION



Polycarbonate body



IP42



IK04



150 lm - 300 lm



Duration: 1 - 3 h - Battery: LiFePO₄



Charging time: 12 h



Supply: 230 V - 50 Hz



LED temperature: 4000 °K



Working temperature: 0 °C to +40 °C




AutoTest



SmartZ®



DIMENSIONS (mm)

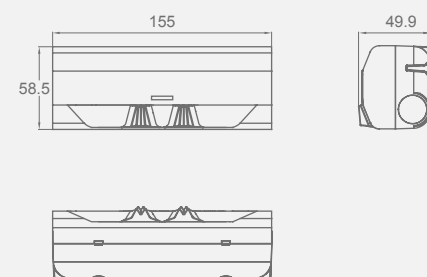

STANDARDS COMPLIANCE

EN-60598-2-22
AutoTest: EN-62034
DALI-2: EN 62386
SmartZ®: ETSI EN 303 447-1

CERTIFICATIONS




RANGE

	Emergency	Type*	Dur.	Battery	Part number
AutoTest	300 lm	NM	1 h	3.2V 1.5A/h LiFePO ₄	LYW5300LX
	150 lm	NM	3 h	3.2V 1.5A/h LiFePO ₄	LYW5150LX3
	300 lm	M/NM	1 h	3.2V 1.5A/h LiFePO ₄	LYW5300LAP
	150 lm	M/NM	3 h	3.2V 1.5A/h LiFePO ₄	LYW5150LAP3
Wireless SmartZ®	300 lm	NM	1 h	3.2V 1.5A/h LiFePO ₄	LYW5300LW

*NM: Non Maintained. The luminaire operates from emergency supply only upon failure of the normal mains supply.
*M/NM: Maintained/Non Maintained. With a switch which allows to select Maintained or Non Maintained mode function.
Luminous flux decreases by 18% in black colour version.
For black version, add "N" at the end of the part number

SPACING TABLE


Spacing table calculated with 1 lux minimum illuminance

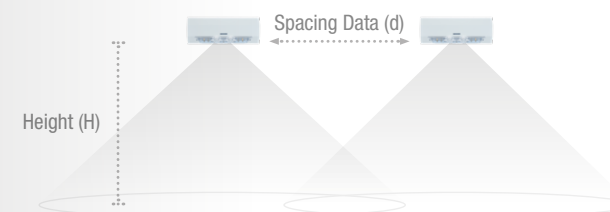

Height (H)	Spacing Data (d)	
	150 lm	300 lm
2.5 m	9.9 m	13.8 m
3 m	9.2 m	14.3 m
3.5 m	8.3 m	13.4 m
4 m	7.0 m	12.2 m
4.5 m	6.9 m	11.2 m

ISOLUX CURVE

300 lm luminaire placed at 3 m height

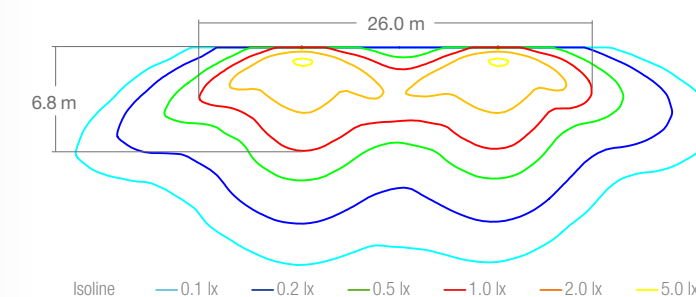

PHOTOMETRIC GUIDE

